


SUBMERSIBLE SEWAGE PUMPS WQD SERIES

OPERATING LIMITS

Fluid temperature up to + 40°C
 Maximum operating depth 5m
 Trans medium's PH:4~10
 220V/50Hz.60Hz 110V/50Hz.60Hz
 220V.110V/50Hz.60Hz are available on request.
 Before order,you could choose "V/Hz" or other special requirement.



PERFORMANCE CHART AT n=2900 l/min

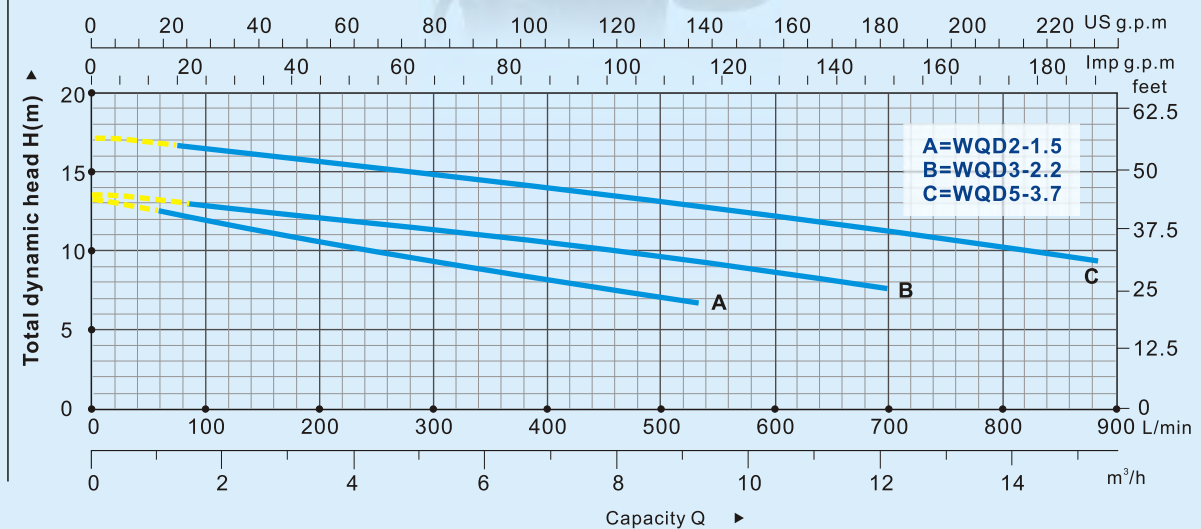

TECHNICAL DATA

Type	Power		Rpm (r/min)	Q(m³/h)												G.W (kg)	QTY (set)	
	HP	kW		0	6	12	18	24	30	36	42	48	54	60				
WQD2-1.5	2	1.5	2900	13	12	11	9	8	7	6							75	250
WQD3-2.2	3	2.2	1450	H(m)	14	12.5	11.5	10	9.5	9	8	7.5	7				87	210
WQD5-3.7	5	3.7	1450		17	16	15	14	13.5	13	12	11.5	11	10	9		92	200