

AUTO SELF-PRIMING CLEAN WATER PUMP SERIES



GA-125JBE
/250JBE/370JBE

GA-125JBCN

GA-550JBE/750JBE

MODEL GA

OPERATING CONDITIONS

- > Max Suction: 9M
- > Max Liquid Temperature: 50°C
- > Max Ambient Temperature: +45°C


PUMP

- > PUMP BODY Cast iron on request
- > IMPELLER Brass on request
- > FRONT COVER Cast iron on request
- > MECHANICAL SEAL SETS Ceramic, graphite and rubber

MOTOR

- > Built-in thermal protector for the single phase motor
- > INSULATION :Class B/F
- > PROTECTION :IP44/54

PERFORMANCE CURVE

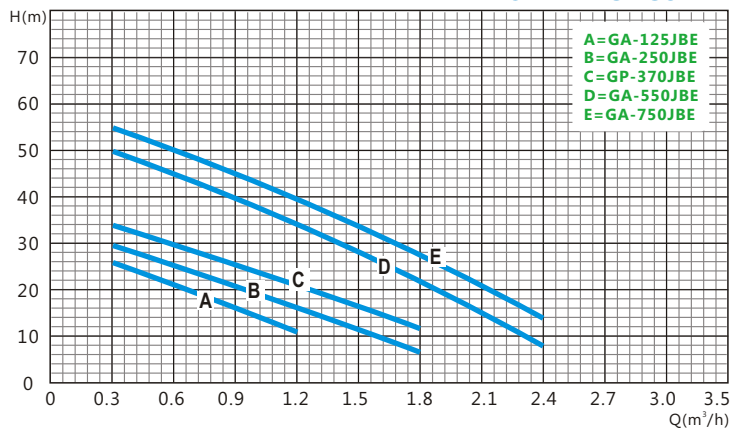

TECHNICAL DATA

MODEL	POWER		AMPERE	Q(m³/h-l/min)						PIPE	LXWXH mm	G.W. KGS.
	HP	KW	Single-phase	0.3	0.6	1.2	1.8	2.4	3			
				5	10	20	30	40	50			
				H(m)								
GA-125JBE	0.2	0.125	1.8	26	21	11				1"X1"	313X243X300	9.5
GA-250JBE	0.4	0.25	2	30	26	16	6			1"X1"	320X235X325	9.9
GP-370JBE	0.5	0.4	2.5	34	30	20	11			1"X1"	320X235X325	10.5
GA-550JBE	0.75	0.55	3.6	50	45	33	21	8		1"X1"	315X275X290	12
GA-750JBE	1	0.75	4	55	49	38	27	14		1"X1"	315X275X290	13