


SELF-PRIMING CLEAN WATER PUMP SERIES

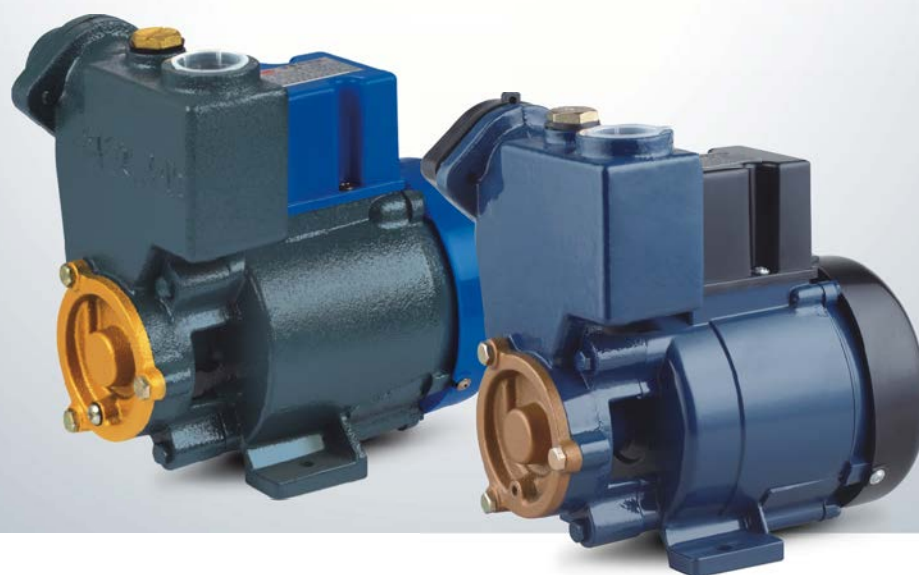

MODEL GP

OPERATING CONDITIONS

- > **Max Suction:** 9M
- > **Max Liquid Temperature:** 50°C
- > **Max Ambient Temperature:** +45°C


PUMP

- > **PUMP BODY** Cast iron on request
- > **IMPELLER** Brass on request
- > **FRONT COVER** Cast iron on request
- > **MECHANICAL SEAL SETS** Ceramic, graphite and rubber

MOTOR

- > **Built-in thermal protector for the single phase motor**
- > **INSULATION** :Class B/F
- > **PROTECTION** :IP44/54

PERFORMANCE CURVE

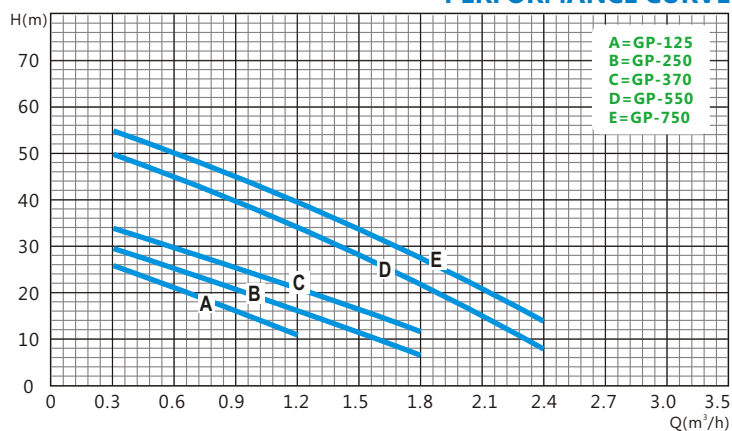

TECHNICAL DATA

MODEL	POWER		AMPERE	Q(m³/h-l/ min)						PIPE	LXWXH mm	G.W. KGS.
	HP	kW	Single-phase	0.3	0.6	1.2	1.8	2.4	3			
				5	10	20	30	40	50			
				H(m)								
GP-125	0.2	0.125	1.8	26	21	11				1"X1"	245X177X237	8.2
GP-250	0.4	0.25	2	30	26	16	6			1"X1"	270X185X270	8.9
GP-370	0.5	0.4	2.5	34	30	20	11			1"X1"	270X185X270	9.5
GP-550	0.75	0.55	3.6	50	45	33	21	8		1"X1"	300X270X280	11
GP-750	1	0.75	4	55	49	38	27	14		1"X1"	300X270X280	12