

PERIPHERAL WATER PUMP SERIES



MODEL CP

OPERATING CONDITIONS

- > **Max Suction:** 8M
- > **Max Liquid Temperature:** 50°C
- > **Max Ambient Temperature:** +45°C


PUMP

- > **PUMP BODY** Cast iron on request
- > **IMPELLER** Brass on request
- > **FRONT COVER** Cast iron/ aluminium on request
- > **MECHANICAL SEAL SETS** Ceramic, graphite and rubber

MOTOR

- > **Built-in thermal protector for the single phase motor**
- > **INSULATION:** Class B/F
- > **PROTECTION:** IP44/54

PERFORMANCE CURVE

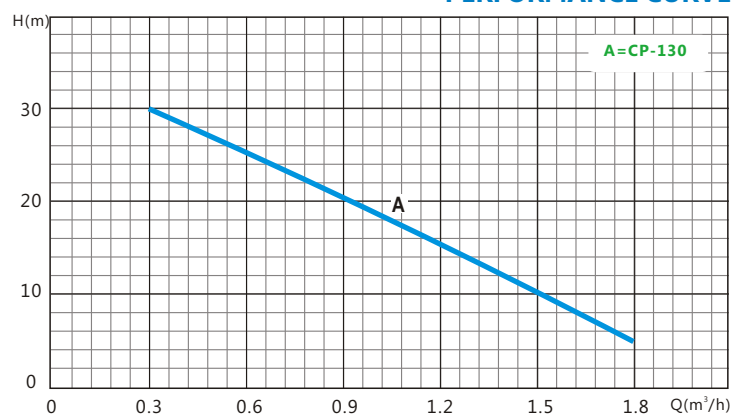

TECHNICAL DATA

MODEL	POWER		AMPERE	Q(m³/h-l/min)				PIPE	LXWXH mm	G.W. KGS.
	HP	kW	Single-phase	0.3	0.6	1.2	1.8			
CP-130	0.5	0.37	2.5	5	10	20	30	1"X1"	305X208X186	8.1