

SELF-PRIMING CLEAN WATER PUMP SERIES



PS-126/226/246/266

PS-120

MODEL PS

OPERATING CONDITIONS

- > Max Suction: 9M
- > Max Liquid Temperature: 50°C
- > Max Ambient Temperature: +45°C


PUMP

- > PUMP BODY Cast iron on request
- > IMPELLER Brass on request
- > FRONT COVER Cast iron on request
- > MECHANICAL SEAL SETS Ceramic, graphite and rubber

MOTOR

- > Built-in thermal protector for the single phase motor
- > INSULATION :Class B/F
- > PROTECTION :IP44/54

PERFORMANCE CURVE

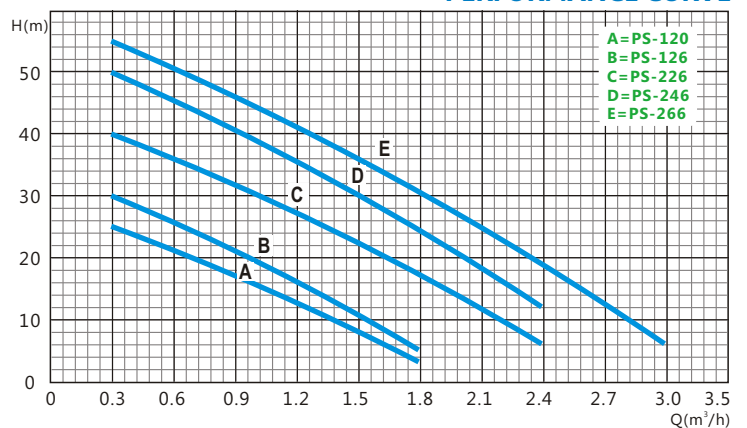

TECHNICAL DATA

MODEL	POWER		AMPERE	Q(m³/h-l/ min)						PIPE	LXWXH mm	G.W. KGS.
	HP	kW	Single-phase	0.3 5	0.6 10	1.2 20	1.8 30	2.4 40	3 50			
PS-120	0.2	0.12	1.8	25	20	12	3			0.5"X0.5"	255X170X235	7.8
PS-126	0.5	0.37	2.5	30	25	15	5			1"X1"	255X175X250	8.8
PS-226	0.75	0.55	3.6	40	36	26	16	6		1"X1"	330X215X310	17
PS-246	1	0.75	5	50	45	34	23	12		1"X1"	330X215X310	17.8
PS-266	1.5	1.1	6.5	55	50	40	30	18	6	1.5"X1.5"	330X215X310	18.6