


# AUTO SELF-PRIMING CLEAN WATER PUMP SERIES

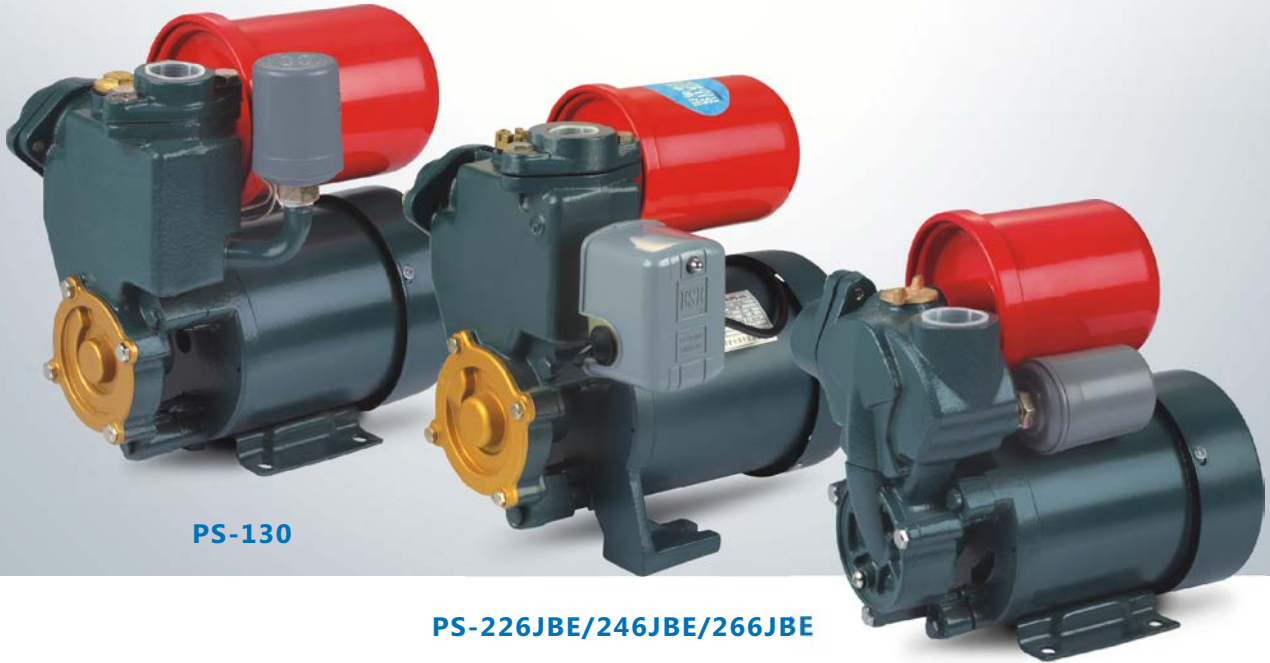

PS-130

PS-226JBE/246JBE/266JBE

PS-120JBE

## MODEL PS

### OPERATING CONDITIONS

- > Max Suction: 9M
- > Max Liquid Temperature: 50°C
- > Max Ambient Temperature: +45°C


### PUMP

- > **PUMP BODY** Cast iron on request
- > **IMPELLER** Brass on request
- > **FRONT COVER** Cast iron on request
- > **MECHANICAL SEAL SETS** Ceramic, graphite and rubber

### MOTOR

- > **Built-in thermal protector for the single phase motor**
- > **INSULATION** :Class B/F
- > **PROTECTION** :IP44/54

### PERFORMANCE CURVE

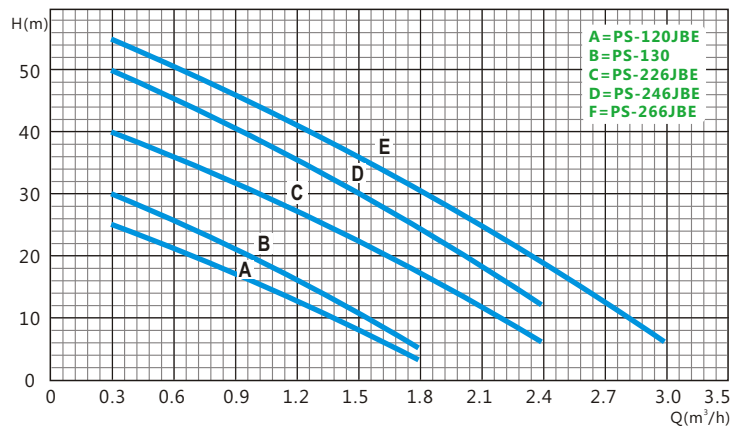

### TECHNICAL DATA

MODEL	POWER		AMPERE Single-phase	Q(m³/h- l/ min)						PIPE	LXWXH mm	G.W. KGS.
	HP	kW		0.3	0.6	1.2	1.8	2.4	3			
			5	10	20	30	40	50				
PS-120JBE	0.2	0.12	1.8	25	20	12	3			0.5"X0.5"	285X185X250	8.5
PS-130	0.5	0.37	2.5	30	25	15	5			1"X1"	285X190X265	9.5
PS-226JBE	0.75	0.55	3.6	40	36	26	16	6		1"X1"	330X270X310	18
PS-246JBE	1	0.75	5	50	45	34	23	12		1"X1"	330X270X310	18.8
PS-266JBE	1.5	1.1	6.5	55	50	40	30	18	6	1.5"X1.5"	330X270X310	19.6