

SELF-PRIMING JET PUMP SERIES



JET-M

JET-102M

ATLAS-125

MODEL JET-M/102M/ATLAS-125

OPERATING CONDITIONS

- > Max Suction: 9M
- > Max Liquid Temperature: 50°C
- > Max Ambient Temperature: +45°C


PUMP

- > PUMP BODY Cast iron
- > IMPELLER Brass
- > FRONT COVER Cast iron
- > DIFFUSER Noryl /PPO
- > MECHANICAL SEAL SETS Ceramic, graphite and rubber

MOTOR

- > Built-in thermal protector for the single phase motor
- > INSULATION: Class B/F
- > PROTECTION: IP44/54

PERFORMANCE CURVE

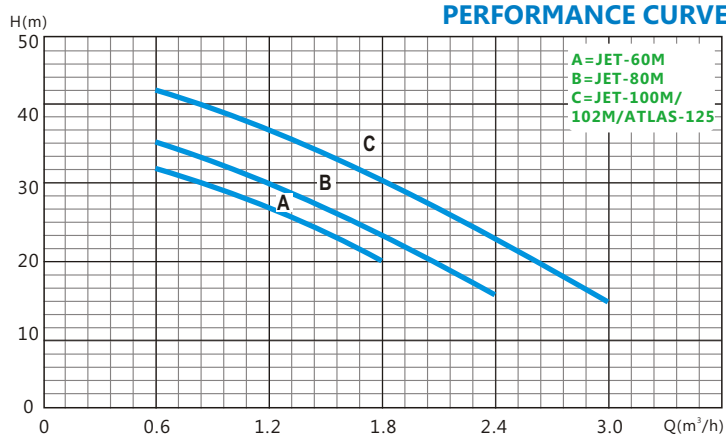

TECHNICAL DATA

MODEL	POWER		AMPERE		Q(m³/h-l/min)					PIPE	LXWXH mm	G.W. KGS.
	HP	kW	Single-phase	Three-phase	0.6	1.2	1.8	2.4	3			
					10	20	30	40	50			
					H(m)							
JET-60M	0.5	0.37	3	1	32	26	18			1"×1"	490X210X250	15.5
JET-80M	0.75	0.55	3.8	1.9	36	30	24	16		1"×1"	490X210X250	16.5
JET-100M/102M/ ATLAS-125	1	0.75	4.7	2.3	42	37	30	23	15	1"×1"	490X210X250	17.5