

SELF-PRIMING JET PUMP SERIES



MODEL SFJ/K and JET-P/S

OPERATING CONDITIONS

- > Max Suction: 9M
- > Max Liquid Temperature: 50°C
- > Max Ambient Temperature: +45°C


PUMP

- > **PUMP BODY** Stainless steel/ABS on request
- > **IMPELLER** Brass/ Stainless steel/ Nylon on request
- > **FRONT COVER** Aluminum on request
- > **DIFFUSER** Noryl /PPO on request
- > **MECHANICAL SEAL SETS** Ceramic, graphite and rubber

MOTOR

- > **Built-in thermal protector for the single phase motor**
- > **INSULATION:** Class B/F
- > **PROTECTION:** IP44/54

PERFORMANCE CURVE

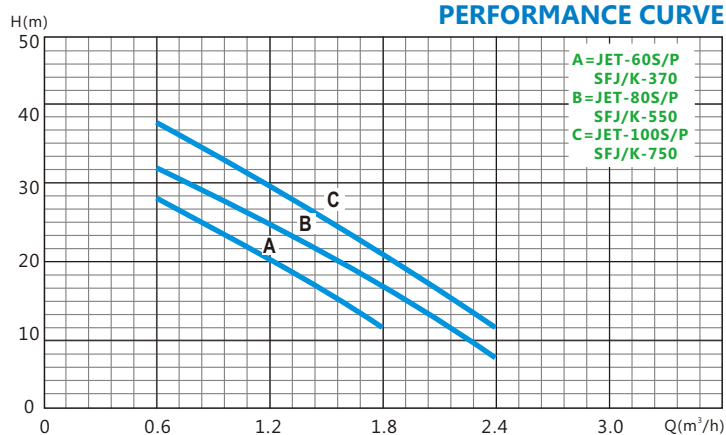

TECHNICAL DATA

MODEL	POWER		AMPERE		Q(m³/h-l/min)				PIPE	LXWXH mm	G.W. KGS.
	HP	kW	Single-phase	Three-phase	0.6	1.2	1.8	2.4			
					10	20	30	40			
JET-60S/P SFJ/K-370	0.5	0.37	3	1	28	19	10		1"×1"	420X220X220	8.3
JET-80S/P SFJ/K-550	0.75	0.55	3.8	1.9	32	24	14	6	1"×1"	420X220X220	9.4
JET-100S/P SFJ/K-750	1	0.75	4.7	2.3	37	28	19	10	1"×1"	420X220X220	10.3