

PERIPHERAL WATER PUMP SERIES



MODEL QB/SFC

OPERATING CONDITIONS


- > Max Suction: 8M
- > Max Liquid Temperature: 50°C
- > Max Ambient Temperature: +45°C

PUMP

- > **PUMP BODY** Cast iron on request
- > **IMPELLER** Brass on request
- > **FRONT COVER** Cast iron/ aluminium on request
- > **MECHANICAL SEAL SETS** Ceramic, graphite and rubber

MOTOR

- > **Built-in thermal protector for the single phase motor**
- > **INSULATION:** Class B/F
- > **PROTECTION:** IP44/54

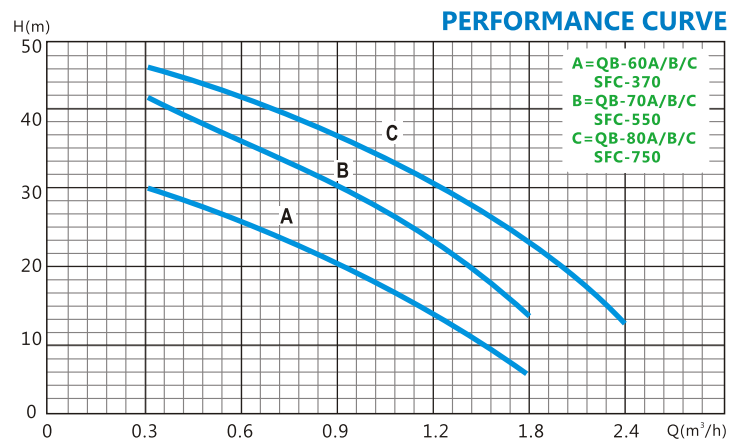

TECHNICAL DATA

MODEL	POWER		AMPERE	Q(m³/h-l/min)						PIPE	LXWXH mm	G.W. KGS.
	HP	kW	Single-phase	0.3	0.6	0.9	1.2	1.8	2.4			
				5	10	15	20	30	40			
QB-60A/B/C / SFC-370	0.5	0.37	3	30	26	21	16	6		1"×1"	280X145X180	5.8
QB-70A/B/C / SFC-550	0.75	0.55	3.8	42	36	31	25	14		1"×1"	310X180X200	9.7
QB-80A/B/C / SFC-750	1	0.75	4.7	46	42	38	33	24	13	1"×1"	310X180X200	10.5