

PERIPHERAL WATER PUMP SERIES



SFB

KF/1

KF/0

MODEL SFB/KF

OPERATING CONDITIONS

- > Max Suction: 8M
- > Max Liquid Temperature: 50°C
- > Max Ambient Temperature: +45°C


PUMP

- > **PUMP BODY** Cast iron on request
- > **IMPELLER** Brass on request
- > **FRONT COVER** Cast iron/ aluminium on request
- > **MECHANICAL SEAL SETS** Ceramic, graphite and rubber

MOTOR

- > **Built-in thermal protector for the single phase motor**
- > **INSULATION:** Class B/F
- > **PROTECTION:** IP44/54

PERFORMANCE CURVE

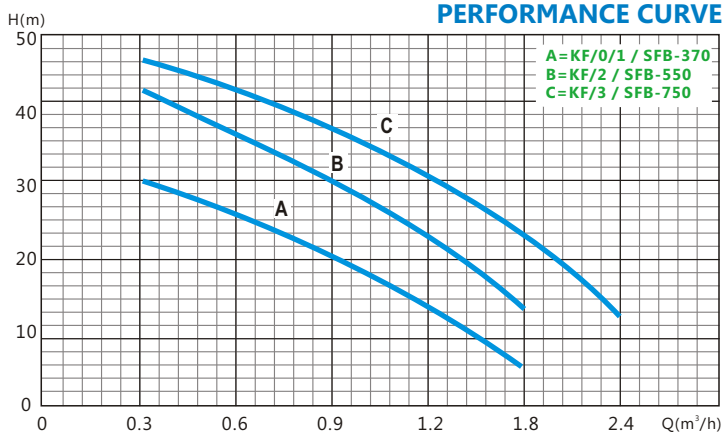

TECHNICAL DATA

MODEL	POWER		AMPERE Single-phase	Q(m³/h-l/min)						PIPE	LXWXH mm	G.W. KGS.
	HP	kW		0.3 5	0.6 10	0.9 15	1.2 20	1.8 30	2.4 40			
KF/0/1 / SFB-370	0.5	0.37	3	30	26	21	16	6	1"×1"	280X145X180	5.8	
KF/2 / SFB-550	0.75	0.55	3.8	42	36	31	25	14	1"×1"	310X180X200	9.7	
KF/3 / SFB-750	1	0.75	4.7	46	42	38	33	24	1"×1"	310X180X200	10.5	