

CENTRIFUGAL PUMP SERIES



CP-2001

CP-2003/2005/2007

MODEL CP

OPERATING CONDITIONS

- > Max Suction: 8M
- > Max Liquid Temperature: 50°C
- > Max Ambient Temperature: +45°C


PUMP

- > PUMP BODY Cast iron on request
- > IMPELLER Brass on request
- > FRONT COVER Cast iron on request
- > MECHANICAL SEAL SETS Ceramic, graphite and rubber

MOTOR

- > Built-in thermal protector for the single phase motor
- > INSULATION: Class B/F
- > PROTECTION: IP44/54

PERFORMANCE CURVE

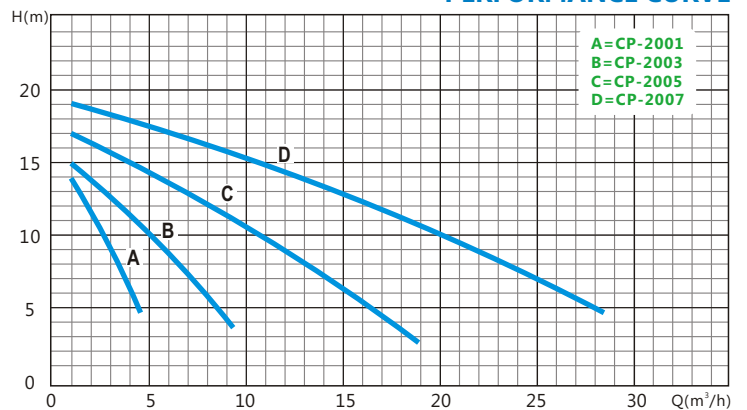

TECHNICAL DATA

MODEL	POWER		AMPERE		Q(m³/h-l/min)								PIPE	LXWXH mm	G.W. KGS.
	HP	kW	Single-phase	Three-phase	1.2	4.8	9.6	14.4	19.2	24	28.8				
					20	80	160	240	320	400	480				
CP-2001	0.75	0.55	4.5	1.7	14	5							1"×1"	320X220X230	18
CP-2003	1	0.75	5.7	2	15	12	4						1.5"×1.5"	360X220X230	20
CP-2005	2	1.5	10.3	4.9	17	15	12	8	3				2"×2"	450X250X260	21.5
CP-2007	3	2.2	12.3	5.5	19	18	17	15	13	11	5		3"×3"	450X310X260	35