

# CENTRIFUGAL PUMP SERIES



## MODEL DK

### OPERATING CONDITIONS

- > **Max Suction:** 8M
- > **Max Liquid Temperature:** 50°C
- > **Max Ambient Temperature:** +45°C


### PUMP

- > **PUMP BODY** Cast iron on request
- > **IMPELLER** Brass on request
- > **FRONT COVER** Cast iron on request
- > **MECHANICAL SEAL SETS** Ceramic, graphite and rubber

### MOTOR

- > **Built-in thermal protector for the single phase motor**
- > **INSULATION:** Class B/F
- > **PROTECTION:** IP44/54

### PERFORMANCE CURVE

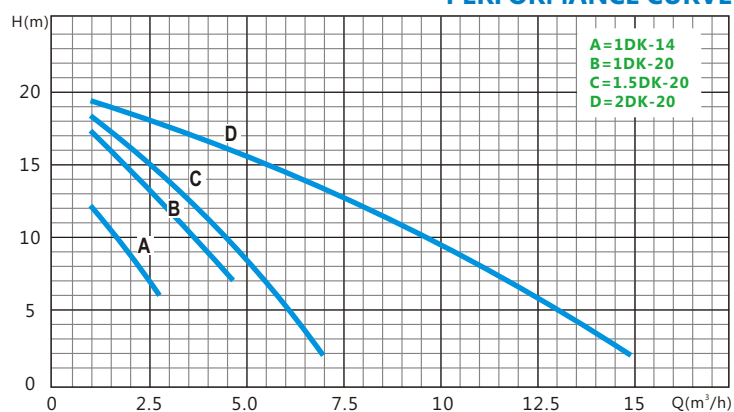

### TECHNICAL DATA

MODEL	POWER		AMPERE		Q(m³/h-l/min)								PIPE	LXWXH mm	G.W. KGS.
	HP	kW	Single-phase	Three-phase	1.2	2.4	3.6	6	9	13.2	19.2				
					20	40	60	100	150	220	320				
					H(m)										
1DK-14	0.5	0.37	2.8	1.1	12	9	6						1"×1"	290X165X190	7.8
1DK-20	0.75	0.55	4.5	1.7	17	15	13	7					1"×1"	310X190X210	8.7
1.5DK-20	1	0.75	5.7	2	18	17	14	10	2				1.5"×1.5"	310X190X210	13
2DK-20	2	1.5	10.3	4.2	19	18	17	16	15	12	4		2"×2"	394X243X265	24.5