


CENTRIFUGAL PUMP SERIES

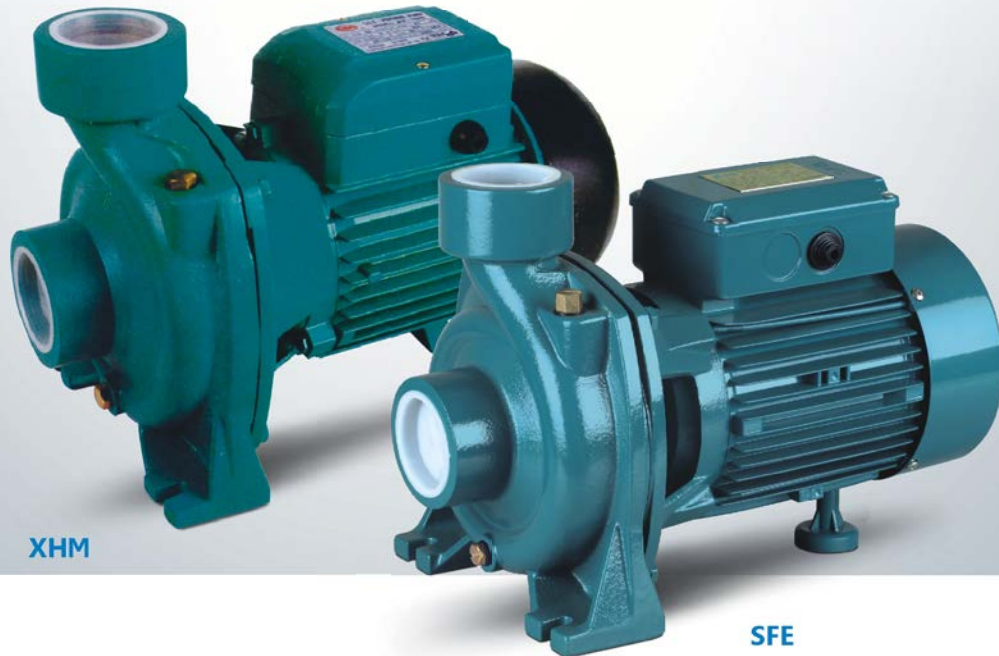

MODEL XHM/SFE

OPERATING CONDITIONS

- > Max Suction: 8M
- > Max Liquid Temperature: 50°C
- > Max Ambient Temperature: +45°C


PUMP

- > PUMP BODY Cast iron on request
- > IMPELLER Brass on request
- > FRONT COVER Cast iron on request
- > MECHANICAL SEAL SETS Ceramic, graphite and rubber

MOTOR

- > Built-in thermal protector for the single phase motor
- > INSULATION: Class B/F
- > PROTECTION: IP44/54

PERFORMANCE CURVE

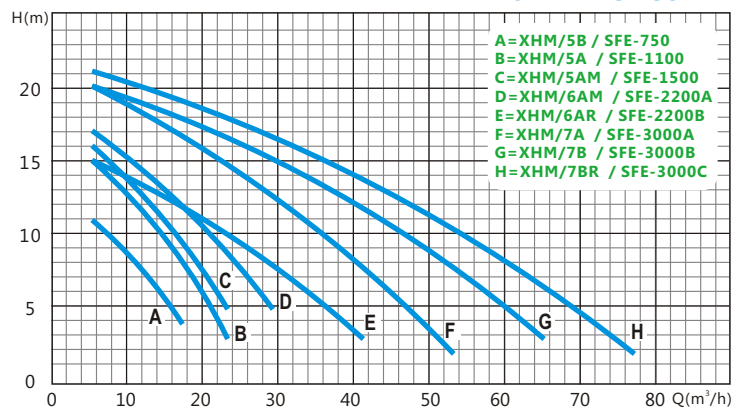

TECHNICAL DATA

MODEL	POWER		AMPERE		Q(m³/h-l/min)										PIPE	LXWXH mm	G.W. KGS.		
	HP	kW	Single-phase	Three-phase	6	12	18	24	30	42	54	66	78						
					100	200	300	400	500	700	900	1100	1300						
XHM/5B / SFE-750	1	0.75	5.5	2.5	11	7	4										2"X2"	350X205X270	15.7
XHM/5A / SFE-1100	1.5	1.1	8.5	3.5	15	12	7	3									2"X2"	415X250X294	28.6
XHM/5AM / SFE-1500	2	1.5	11	3.6	16	13	9	5									2"X2"	415X250X294	30
XHM/6AM / SFE-2200A	3	2.2	15	5.5	17	15	10	9	5								2"X2"	440X270X340	40.5
XHM/6AR / SFE-2200B	3	2.2	15	5.5	15	14	11	10	7	3							3"X3"	440X270X340	40
XHM/7A / SFE-3000A	4	3	20	6.8	20	18	16	14	12	8	2						2"X2"	510X270X340	42
XHM/7B / SFE-3000B	4	3	20	6.8	20	19	17	16	14	10	6	3					3"X3"	510X270X340	41.5
XHM/7BR / SFE-3000C	4	3	20	6.8	21	20	18	17	15	12	9	6	2				4"X4"	510X270X340	41