

DOUBLE IMPELLERS

CENTRIFUGAL PUMP SERIES



MODEL

2CT/SFF

OPERATING CONDITIONS

- > **Max Suction:** 8M
- > **Max Liquid Temperature:** 50°C
- > **Max Ambient Temperature:** +45°C


PUMP

- > **PUMP BODY** Cast iron on request
- > **IMPELLER** Brass on request
- > **FRONT COVER** Cast iron on request
- > **MECHANICAL SEAL SETS** Ceramic, graphite and rubber

MOTOR

- > **Built-in thermal protector for the single phase motor**
- > **INSULATION:** Class B/F
- > **PROTECTION:** IP44/54

PERFORMANCE CURVE

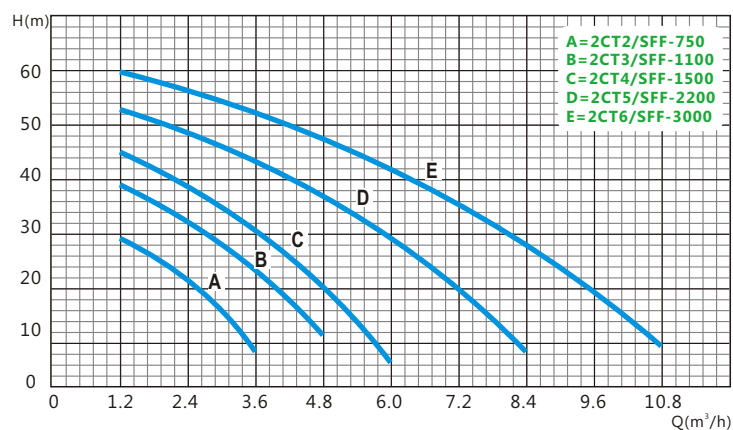

TECHNICAL DATA

MODEL	POWER		AMPERE		Q(m³/h-l/min)										PIPE	LXWXH mm	G.W. KGS.									
	HP	kW	Single-phase	Three-phase	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8													
					20	40	60	80	100	120	140	160	180													
2CT2/SFF-750	1	0.75	2.8	1.1	29	21	8											1"X1"	420X395X290	15.5						
2CT3/SFF-1100	1.5	1.1	9.4	3.5	39	31	21	11											1.25"X1"	430X260X320	24					
2CT4/SFF-1500	2	1.5	11.4	4.2	45	36	27	15	6											1.25"X1"	430X260X320	23.7				
2CT5/SFF-2200	3	2.2	13.5	5	53	45	39	30	23	14	4											1.5"X1.25"	467X270X313	34.6		
2CT6/SFF-3000	4	3		7.6	60	55	49	43	37	30	23	15	9											1.5"X1.25"	467X270X313	34.3