

SWIMMING POOL PUMP SERIES



FCP

SFN

MODEL FCP/SFN

OPERATING CONDITIONS

- > Max Suction: 9M
- > Max Liquid Temperature: 50°C
- > Max Ambient Temperature: +45°C


PUMP

- > PUMP BODY ABS on request
- > IMPELLER PPO on request
- > FRONT COVER Aluminum on request
- > MECHANICAL SEAL SETS Ceramic, graphite and rubber

MOTOR

- > Built-in thermal protector for the single phase motor
- > INSULATION: Class B/F
- > PROTECTION: IP44/54

PERFORMANCE CURVE

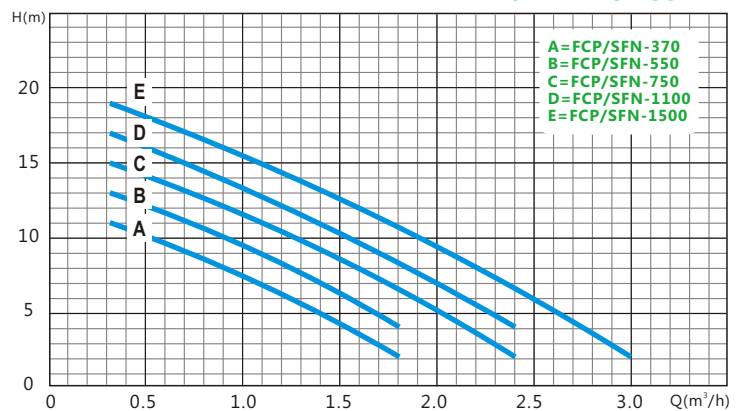

TECHNICAL DATA

MODEL	POWER		AMPERE Single-phase	Q(m ³ /h-l/min)						PIPE	LXWXH mm	G.W. KGS.
	HP	kW		H(m)								
			0.3 20	0.6 60	1.2 100	1.8 150	2.4 200	3 250				
FCP/SFN-370	0.5	0.37	2.5	11	9	5	2			1.5"X1.5"	500X230X170	8.5
FCP/SFN-550	0.75	0.55	3.6	13	11	8	4			1.5"X1.5"	520X230X170	9.5
FCP/SFN-750	1	0.75	5	15	13	10	6	2		1.5"X1.5"	520X230X170	10.5
FCP/SFN-1100	1.5	1.1	6.5	17	15	12	8	4		2"X2"	620X230X315	15
FCP/SFN-1500	2	1.5	9.5	19	17	14	11	7	2	2"X2"	620X230X315	16