


OIL PUMP SERIES

APPLICATION

Designed for water and clean oil except petrol. Reliable and low maintenance, they are suitable for domestic use and industrial applications.

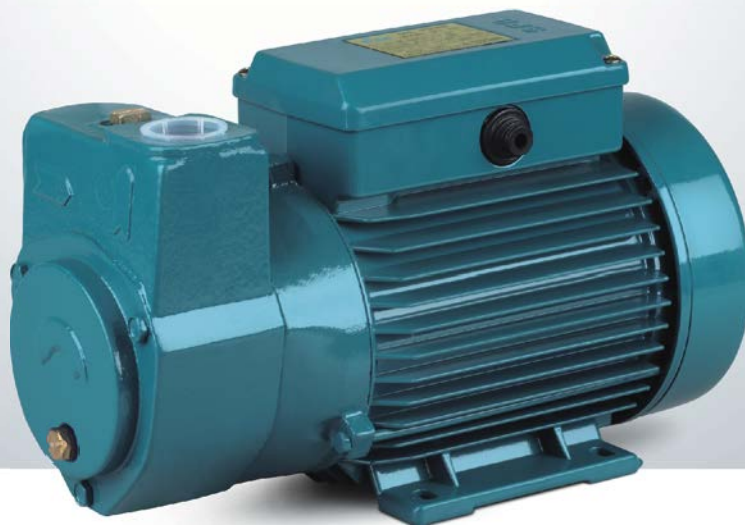

MODEL SFO

OPERATING CONDITIONS

- > **Max Suction:** 9M
- > **Max Ambient Temperature:** +45°C


PUMP

- > **PUMP BODY** Cast iron on request
- > **IMPELLER** Brass on request
- > **FRONT COVER** Cast iron on request
- > **OIL SEAL SETS**

MOTOR

- > **Built-in thermal protector for the single phase motor**
- > **INSULATION:** Class B/F
- > **PROTECTION:** IP44/54

PERFORMANCE CURVE

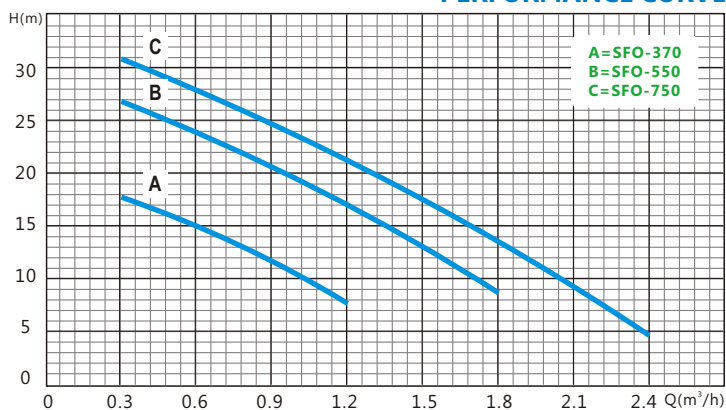

TECHNICAL DATA

MODEL	POWER		AMPERE Single-phase	Q(m³/h-l/min)					PIPE	LXWXH mm	G.W. KGS.
	HP	kW		0.3	0.6	1.2	1.8	2.4			
			10	20	30	40	50				
SFO-370	0.5	0.37	2.5	18	14	8			1"X1"	350X175X235	10
SFO-550	0.75	0.55	3.6	27	23	17	9		1"X1"	350X175X235	11
SFO-750	1	0.75	5	31	27	21	14	5	1"X1"	350X175X235	11.74