


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 75QJ(D)

PERFORMANCE CURVE

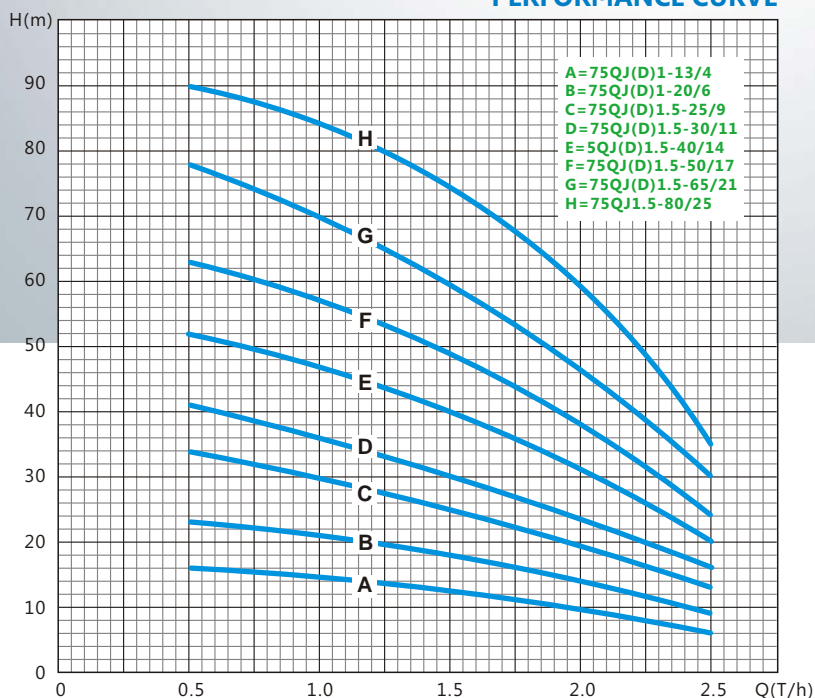

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)						Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)				
	kW	HP			Q T/h	0.5	1	1.2	1.5	2			2.5	Total length T	Motor length M	Pump casing length P	Pump casing external diameter Φ(mm)
75QJD1-13/4 A/B	0.15	0.2	220	1.2	H	16	13	12	11	8	6	5	660	360	300	72	
75QJD1-20/6 A/B	0.18	0.25	220	1.6	(m)	23	20	18	16	12	9	6	725	375	350	72	
75QJD1.5-25/9 A/B	0.25	0.34	220	2.1		34	30	28	25	18	13	7	820	395	425	72	
75QJD1.5-30/11 A/B	0.37	0.5	220	3.6		41	37	35	30	22	16	8	900	425	475	72	
75QJD1.5-40/14 A/B	0.55	0.75	220	4.4		52	47	44	40	28	20	9	1005	455	550	72	
75QJD1.5-50/17 A/B	0.75	1	220	5.4		63	57	53	50	34	24	11	1110	485	625	72	
75QJD1.5-65/21 A/B	1.1	1.5	220	6.5		78	70	66	65	42	30	13	1240	515	725	72	
75QJ1-13/4 A/B	0.15	0.2	380	0.6		16	13	12	11	8	6	1	4.5	650	350	300	72
75QJ1-20/6 A/B	0.18	0.25	380	0.8		23	20	18	16	12	9		5.5	710	360	350	72
75QJ1.5-25/9 A/B	0.25	0.34	380	1.1		34	30	28	25	18	13		6.5	800	375	425	72
75QJ1.5-30/11 A/B	0.37	0.5	380	1.8		41	37	35	30	22	16		7.5	870	395	475	72
75QJ1.5-40/14 A/B	0.55	0.75	380	2.2		52	47	44	40	28	20		8.5	975	425	550	72
75QJ1.5-50/17 A/B	0.75	1	380	2.8		63	57	53	50	34	24		10	1080	455	625	72
75QJ1.5-65/21 A/B	1.1	1.5	380	3.3		78	70	66	65	42	30		12	1210	485	725	72
75QJ1.5-80/25 A/B	1.5	2	380	4		90	84	81	80	50	35		15	1340	515	825	72

NOTE: 0.15KW-0.25KW pumps are available for the wind and solar power generation.