
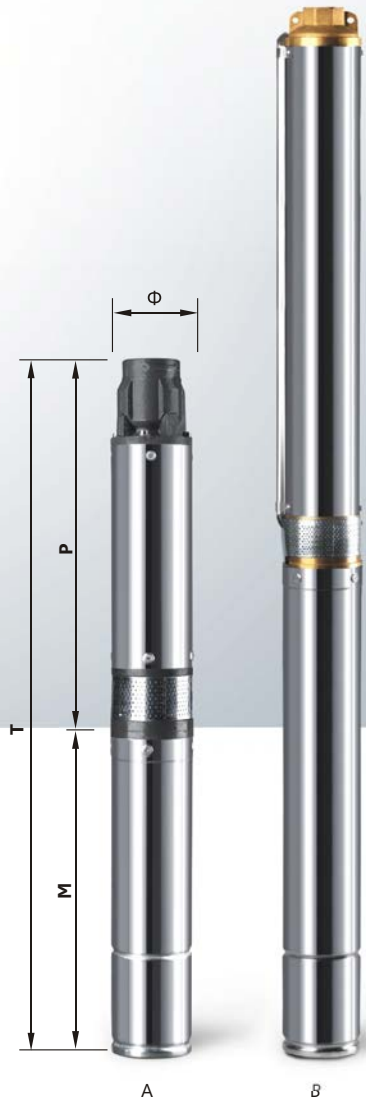


# STAINLESS STEEL SUBMERSIBLE PUMP

## MODEL 90QJ(D)-2T

PERFORMANCE CURVE

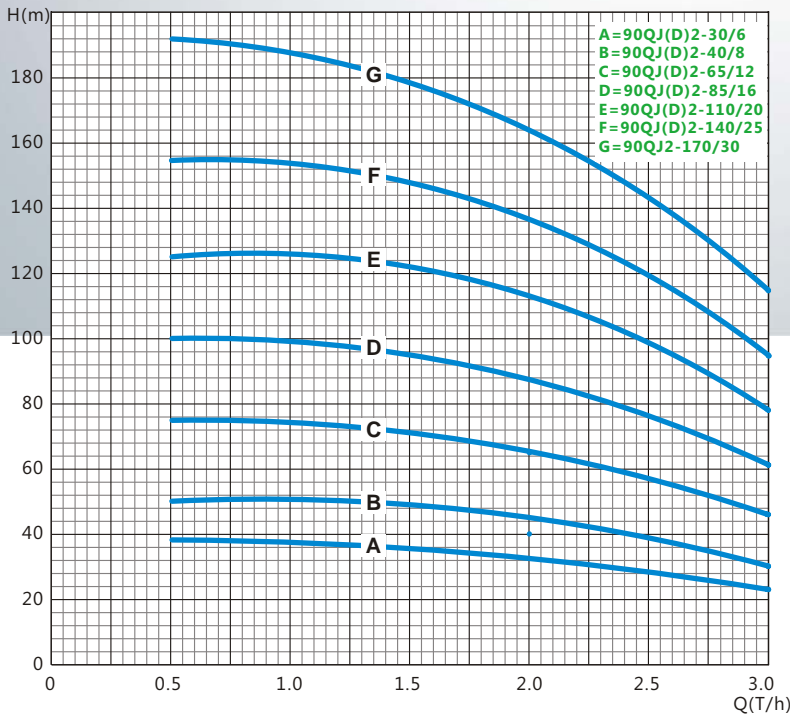

### TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)							Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)			
	kW	HP			Q T/h	H m	0.5	1	1.5	2	2.5			3	Total length T	Motor length M	Pump casing length P
90QJD2-30/6 A/B	0.37	0.5	220	3.4	H (m)	38	35	33	30	27	23	1 1/2	15	745	365	380	90
90QJD2-40/8 A/B	0.55	0.75	220	4.4		50	47	45	40	36	31		16	820	380	440	90
90QJD2-50/10 A/B	0.75	1.25	220	5.0		60	56	54	50	45	39		16.5	900	400	500	90
90QJD2-65/12 A/B	0.90	1.25	220	5.8		75	70	67	65	54	46		17.5	970	410	560	90
90QJD2-85/16 A/B	1.1	1.5	220	7.2		100	93	90	85	72	61		19.5	1120	440	680	90
90QJD2-110/20 A/B	1.5	2	220	9.8		125	118	113	110	90	78		22.5	1270	470	800	90
90QJD2-140/25 A/B	2.2	3	220	12		155	148	145	140	113	95		25	1450	500	950	90
90QJ2-30/6 A/B	0.37	0.5	380	1.8		38	35	33	30	27	23		14	735	355	380	90
90QJ2-40/8 A/B	0.55	0.75	380	2.2		50	47	45	40	36	31		15	805	365	440	90
90QJ2-50/10 A/B	0.75	1	380	2.5		60	56	54	50	45	39		15.5	880	380	500	90
90QJ2-65/12 A/B	0.90	1.25	380	2.8		75	70	67	65	54	46		16	960	400	560	90
90QJ2-85/16 A/B	1.1	1.5	380	3.6		100	93	90	85	72	61		18	1090	410	680	90
90QJ2-110/20 A/B	1.5	2	380	4.6		125	118	113	110	90	78		21	1240	440	800	90
90QJ2-140/25 A/B	2.2	3	380	5.8		155	148	145	140	113	95		24	1420	470	950	90
90QJ2-170/30 A/B	3	4	380	7.2	192	178	175	170	135	115	27	1600	500	110	90		