


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 100QJ(D)-2T

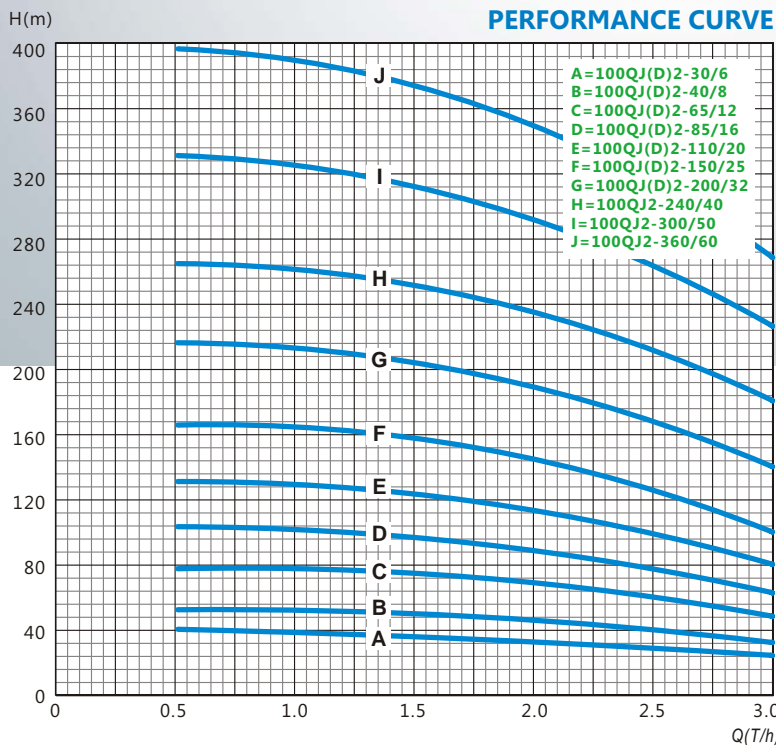

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)						Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)			
	kW	HP			Q	H	0.5	1	1.5	2			2.5	3	Total length T	Motor length M
100QJD2-30/6 A/B	0.37	0.5	220	3.2	H	40	36	34	30	28	24	13	749	357	392	96
100QJD2-40/8 A/B	0.55	0.75	220	4.2		51	48	46	40	37	32	14	821	372	449	96
100QJD2-65/12 A/B	0.75	1	220	5.8		77	72	68	65	55	47	15	954	392	562	96
100QJD2-85/16 A/B	1.1	1.5	220	7.8		102	95	90	85	73	62	17	1098	422	676	96
100QJD2-110/20 A/B	1.5	2	220	10.2		130	120	115	110	92	80	19	1273	452	821	96
100QJD2-150/25 A/B	2.2	3	220	12.5		165	160	155	150	115	100	21	1455	492	963	96
100QJD2-200/32 A/B	3	4	220	16		215	210	205	200	160	140	24	1728	567	1161	96
100QJ2-30/6 A/B	0.37	0.5	380	1.4	H	40	36	34	30	28	24	12.5	739	347	392	96
100QJ2-40/8 A/B	0.55	0.75	380	1.9		51	48	46	40	37	32	13.5	806	357	449	96
100QJ2-65/12 A/B	0.75	1	380	2.8		77	72	68	65	55	47	14.5	934	372	562	96
100QJ2-85/16 A/B	1.1	1.5	380	3.8		102	95	90	85	73	62	16	1068	392	676	96
100QJ2-110/20 A/B	1.5	2	380	4.8		130	120	115	110	92	80	18	1243	422	821	96
100QJ2-150/25 A/B	2.2	3	380	5.8		165	160	155	150	115	100	20	1415	452	963	96
100QJ2-200/32 A/B	3	4	380	7.2		215	210	205	200	160	140	23	1653	492	1161	96
100QJ2-240/40 A/B	4	5.5	380	9.5		265	260	248	240	200	180	26	1691	567	1124	96
100QJ2-300/50 A/B	5.5	7.5	380	12.5		330	325	310	300	250	225	29	1986	652	1334	96
100QJ2-360/60 A/B	7.5	10	380	16.5		396	390	372	360	300	270	35	2317	742	1575	96