
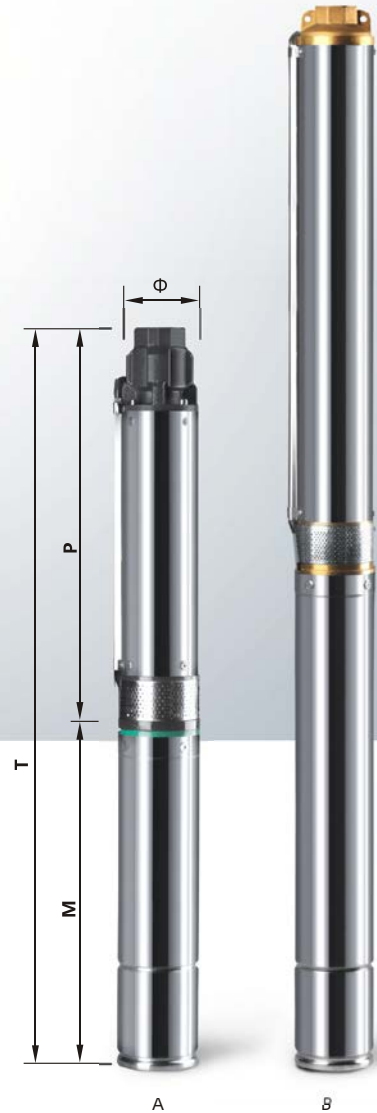


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 100QJ(D)-4T

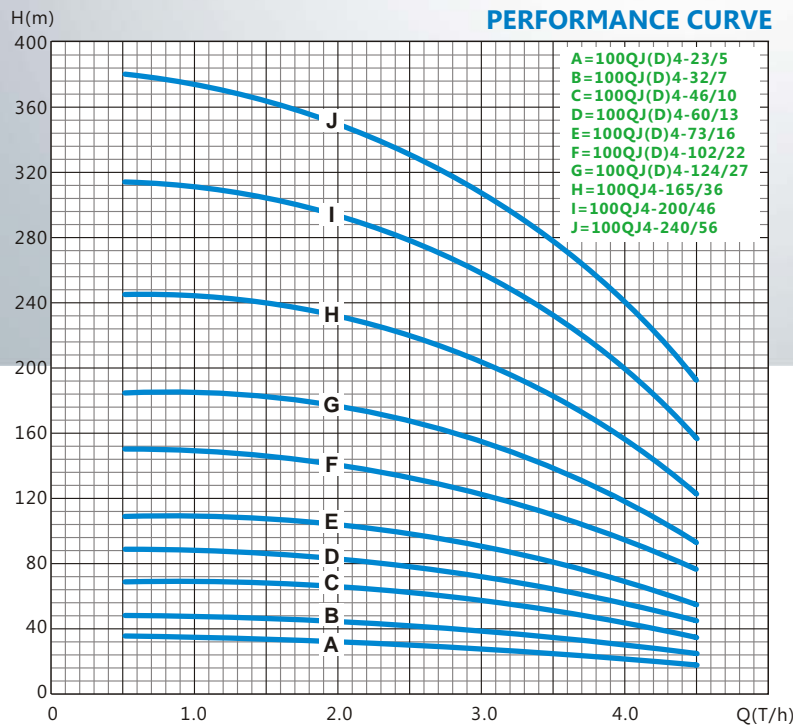

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)							Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)			
	kW	HP			Q T/h	0.5	1	2	3.2	4	4.5			Total length T	Motor length M	Pump casing length P	Pump casing external diameter Φ(mm)
100QJD4-23/5 A/B	0.37	0.5	220	3.2	H	34	32	30	26	23	17	12.5	721	357	364	96	
100QJD4-32/7 A/B	0.55	0.75	220	4.2		47	44	42	36	32	24	13.5	792	372	620	96	
100QJD4-46/10 A/B	0.75	1	220	5.8		68	64	61	52	45	34	14.5	898	392	506	96	
100QJD4-60/13 A/B	1.1	1.5	220	7.8		88	83	80	68	60	45	16	1013	422	591	96	
100QJD4-73/16 A/B	1.5	2	220	10.2		108	102	98	84	73	54	18	1119	452	667	96	
100QJD4-102/22 A/B	2.2	3	220	12.5		150	141	135	114	102	75	20	1370	492	878	96	
100QJD4-124/27 A/B	3	4	220	16		184	173	165	142	124	92	23	1586	567	1019	96	
100QJ4-23/5 A/B	0.37	0.5	380	1.4	H	34	32	30	26	23	17	12	711	347	364	96	
100QJ4-32/7 A/B	0.55	0.75	380	1.9		47	44	42	36	32	24	1 1/2	777	357	420	96	
100QJ4-46/10 A/B	0.75	1	380	2.8		68	64	61	52	45	34	14	878	372	506	96	
100QJ4-60//13 A/B	1.1	1.5	380	3.8		88	83	80	68	60	45	15.5	983	392	591	96	
100QJ4-73/16 A/B	1.5	2	380	4.8		108	102	98	84	73	54	17.5	1089	422	667	96	
100QJ4-102/22 A/B	2.2	3	380	5.8		150	141	135	114	102	75	19.5	1330	452	878	96	
100QJ4-124/27 A/B	3	4	380	7.2		184	173	165	142	124	92	22	1511	492	1019	96	
100QJ4-165/36 A/B	4	5.5	380	9.5		245	230	220	188	165	122	26	1873	567	1306	96	
100QJ4-200/46 A/B	5.5	7.5	380	12.5		313	295	282	240	200	156	31	2269	652	1617	96	
100QJ4-240/56 A/B	7.5	10	380	16.5		381	358	342	292	240	191	38	2639	742	1897	96	