
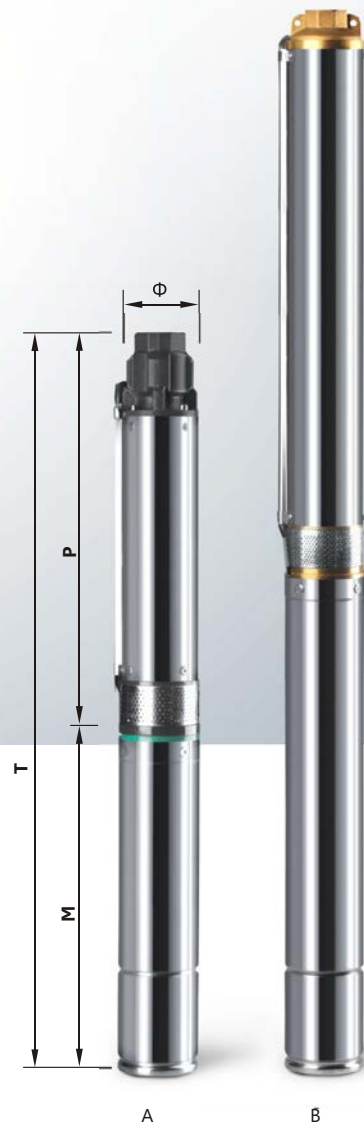


# STAINLESS STEEL SUBMERSIBLE PUMP

## MODEL 100QJ(D)-6T

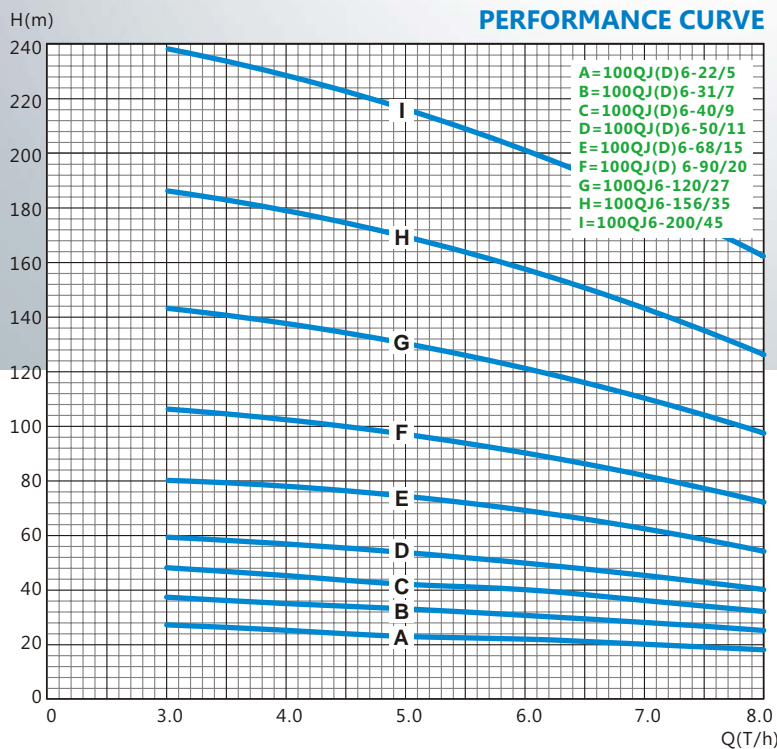

### TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)								Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)			
	kW	HP			Q T/h	3	4	5	6	7	8	Total length T			Motor length M	Pump casing length P	Pump casing external diameter Φ(mm)	
100QJD6-22/5 A/B	0.55	0.75	220	4.2	H	27	25	23	22	20	18	13	804	372	432	96		
100QJD6-31/7 A/B	0.75	1	220	5.8		37	35	33	31	28	25	14	900	392	508	96		
100QJD6-40/9 A/B	1.1	1.5	220	7.8		48	45	42	40	36	32	16	1006	422	584	96		
100QJD6-50/11 A/B	1.5	2	220	10.2		59	54	52	50	44	40	18	1112	452	660	96		
100QJD6-68/15 A/B	2.2	3	220	12.5		80	74	70	68	60	54	20	1304	492	812	96		
100QJD6-90/20 A/B	3	4	220	16		106	98	92	90	80	72	23	1600	567	1033	96		
100QJ6-22/5 A/B	0.55	0.75	380	1.9	H	27	25	23	22	20	18	12.5	784	352	432	96		
100QJ6-31/7 A/B	0.75	1	380	2.8		37	35	33	31	28	25	13.5	880	372	508	96		
100QJ6-40/9 A/B	1.1	1.5	380	3.8		48	45	42	40	36	33	15.5	974	392	584	96		
100QJ6-50/11 A/B	1.5	2	380	4.5		59	54	52	50	44	40	17.5	1082	422	660	96		
100QJ6-68/15 A/B	2.2	3	380	5.8		80	74	70	68	60	54	19.5	1264	452	812	96		
100QJ6-90/20 A/B	3	4	380	7.2		106	98	92	90	80	72	22	1525	492	1033	96		
100QJ6-120/27 A/B	4	5.5	380	9.5		143	133	124	120	108	97	25	1866	567	1299	96		
100QJ6-156/35 A/B	5.5	7.5	380	12.5		186	172	161	156	140	126	30	2255	652	1603	96		
100QJ6-200/45 A/B	7.5	10	380	16.5		238	220	207	200	180	162	36	2756	742	2014	96		