
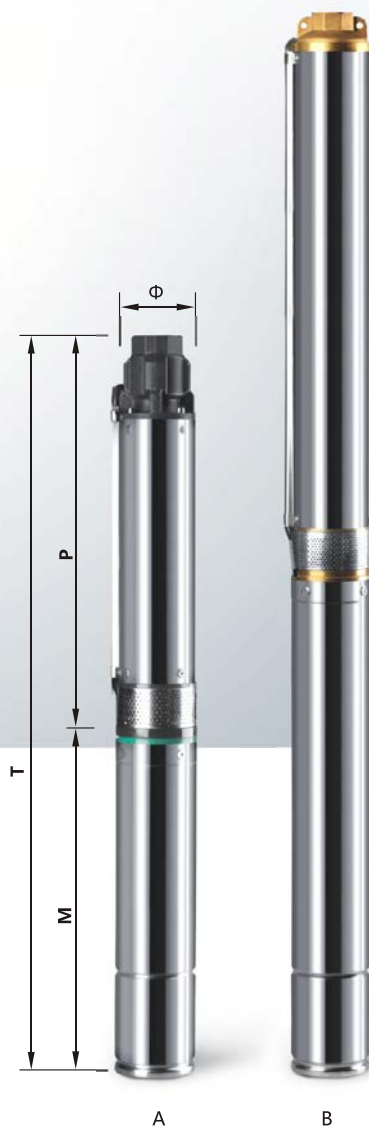


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 100QJ(D)-8T

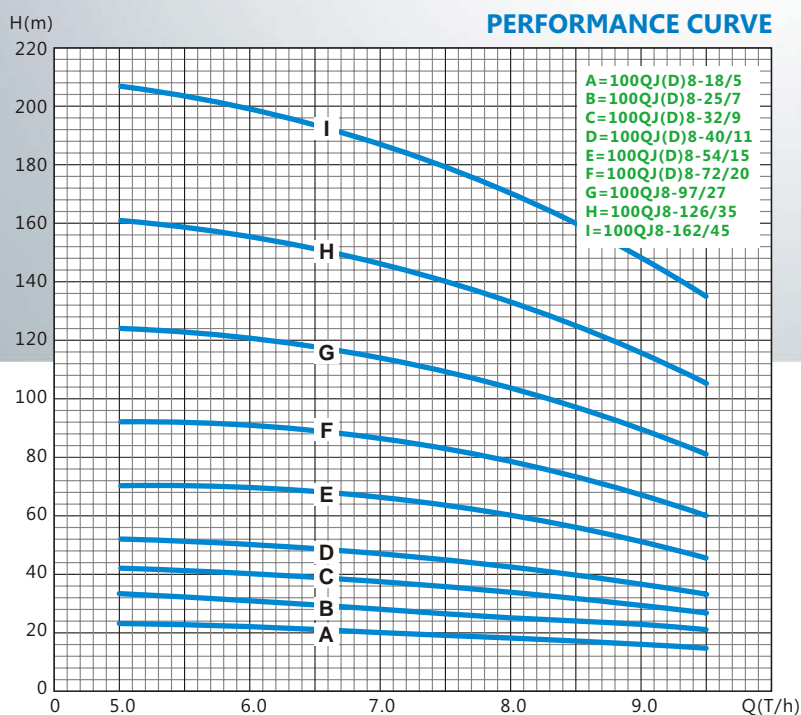

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)							Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)			
	kW	HP			H	Q	5	6	7	8	9			9.5	Total length T	Motor length M	Pump casing length P
100QJD8-18/5 A/B	0.55	0.75	220	4.2	H	23	22	20	18	16	15	1/2	13	804	372	432	96
100QJD8-25/7 A/B	0.75	1	220	5.8	33	31	28	25	23	21	14		900	392	508	96	
100QJD8-32/9 A/B	1.1	1.5	220	7.8	42	40	36	32	30	27	16		1006	422	584	96	
100QJD8-40/11 A/B	1.5	2	220	10.2	52	50	44	40	37	33	18		1112	452	660	96	
100QJD8-54/15 A/B	2.2	3	220	12.5	70	68	60	54	50	45	20		1304	492	812	96	
100QJD8-72/20 A/B	3	4	220	16	92	90	80	72	68	60	23		1600	567	1033	96	
100QJ8-18/5 A/B	0.55	0.75	380	1.9	23	22	20	18	16	15	12.5		784	352	432	96	
100QJ8-25/7 A/B	0.75	1	380	2.8	33	31	28	25	23	21	13.5		880	372	508	96	
100QJ8-32/9 A/B	1.1	1.5	380	3.8	42	40	36	32	30	27	15.5		974	392	584	96	
100QJ8-40/11 A/B	1.5	2	380	4.5	52	50	44	40	37	33	17.5		1082	422	660	96	
100QJ8-54/15 A/B	2.2	3	380	5.8	70	68	60	54	50	45	19.5		1264	452	812	96	
100QJ8-72/20 A/B	3	4	380	7.4	92	90	80	72	68	60	22		1525	492	1033	96	
100QJ8-97/27 A/B	4	5.5	380	9.5	124	120	108	97	89	81	25		1866	567	1299	96	
100QJ8-126/35 A/B	5.5	7.5	380	12.5	161	156	140	126	116	105	30		2255	652	1603	96	
100QJ8-162/45 A/B	7.5	10	380	16.5	207	200	180	162	149	135	36		2756	742	2014	96	