
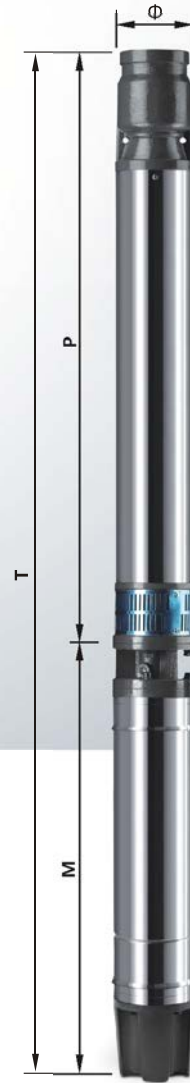


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 125QJ(D) -15T

PERFORMANCE CURVE

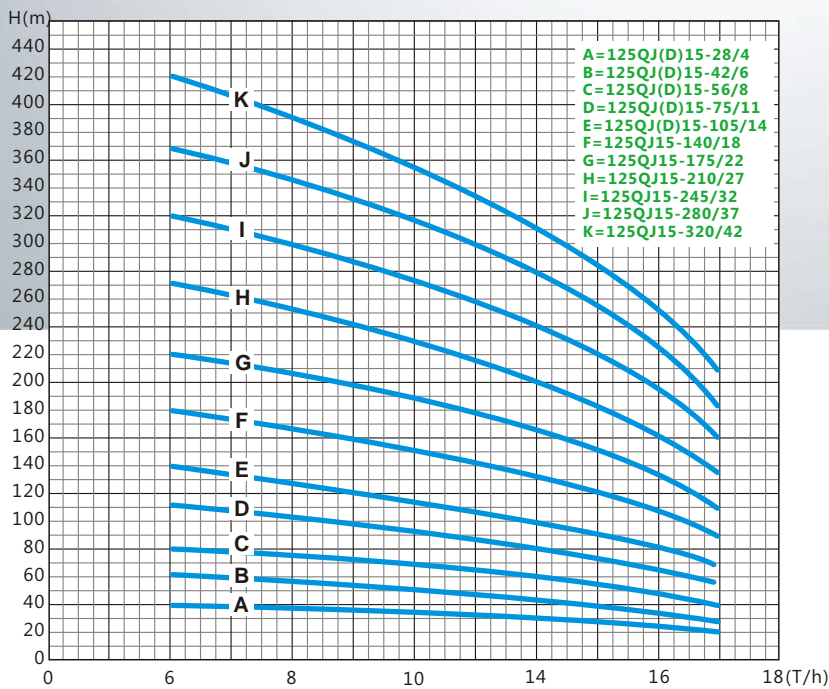

TECHNICAL DATA

Model	Power		Voltage	Ampere	Flow T/h	Capacity(Q) and Head(H)						Pump weight Kg	Total length T	Motor length M
	kW	HP	V	A		6	8	10	15	16	17			
125QJ(D)15-28/4	1.5	2	220/380	9.5/4.8	Head m	40	36	32	28	24	20	42	900	460
125QJ(D)15-42/6	2.2	3	220/380	12.5/6.2		60	54	48	42	36	30	46	1020	480
125QJ(D)15-56/8	3	4	220/380	16.5/7.5		80	72	64	56	48	40	50	1150	510
125QJ(D)15-75/11	4	5.5	220/380	21/9.5		110	99	88	75	66	55	55	1340	550
125QJ(D)15-105/14	5.5	7.5	220/380	26/13		140	126	112	105	84	70	60	1540	600
125QJ15-140/18	7.5	10	380	16.5		180	162	148	140	108	90	65	1800	660
125QJ15-175/22	9.2	12.5	380	20		220	198	187	175	132	110	70	2050	710
125QJ15-210/27	11	15	380	25		270	243	229	210	162	135	76	2360	770
125QJ15-245/32	13	17.5	380	29		320	288	272	245	192	160	82	2670	830
125QJ15-280/37	15	20	380	34		370	333	314	280	222	185	90	2980	890
125QJ15-320/42	18.5	25	380	42		420	378	357	320	252	210	98	3290	950