
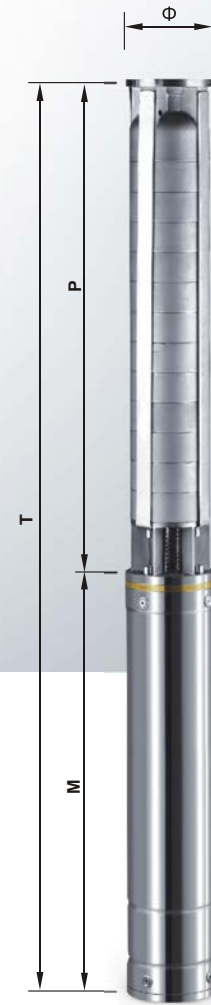


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 125QJ(G)-10T

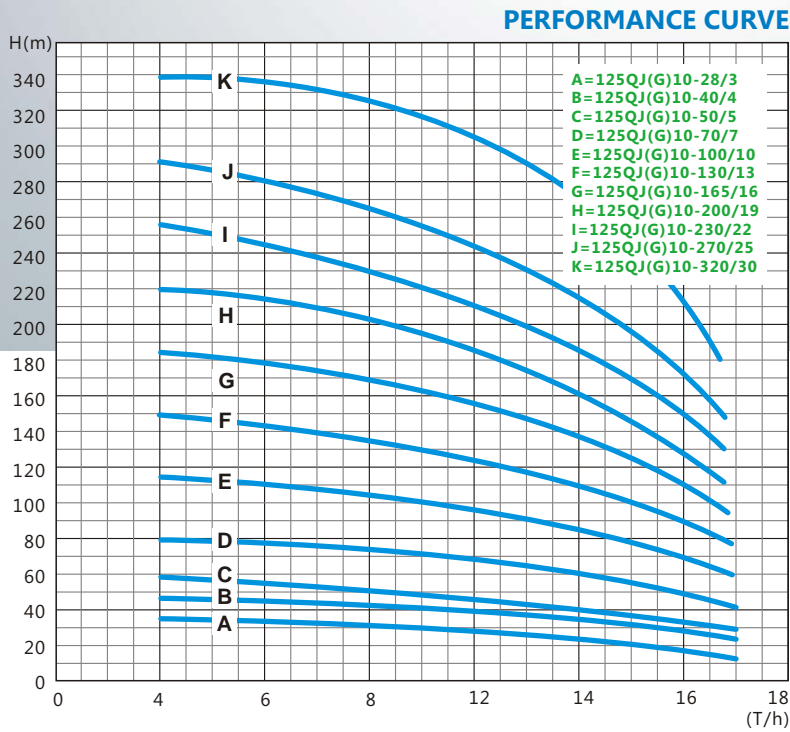

TECHNICAL DATA

Model	Power		Voltage V	Ampere A	Flow T/h	Capacity(Q) and Head(H)						Pump weight Kg	Total length T	Motor length M
	kW	HP				6	8	10	15	16	17			
125QJ(G)10-28/3	1.5	2	220/380	9.5/4.8	Head m	35	33	31	28	24	18	56	785	460
125QJ(G)10-40/4	2.2	3	220/380	12.5/6.2		46	44	42	40	32	24	60	845	480
125QJ(G)10-50/5	3	4	220/380	16.5/7.5		58	55	52	50	40	30	65	915	510
125QJ(G)10-70/7	4	5.5	220/380	21/9.5		80	77	74	70	56	42	72	1035	550
125QJ(G)10-100/10	5.5	7.5	220/380	26/13		115	110	105	100	80	60	80	1210	600
125QJ(G)10-130/13	7.5	10	380	16.5		150	143	136	130	104	78	88	1395	660
125QJ(G)10-165/16	9.2	12.5	380	20		185	179	170	165	128	96	98	1570	710
125QJ(G)10-200/19	11	15	380	25		220	212	204	200	152	114	108	1750	770
125QJ(G)10-230/22	13	17.5	380	29		255	246	234	230	176	132	118	1935	830
125QJ(G)10-270/25	15	20	380	34		290	280	275	270	200	150	128	2120	890
125QJ(G)10-320/30	18.5	25	380	42		340	330	325	320	240	180	140	2405	970