
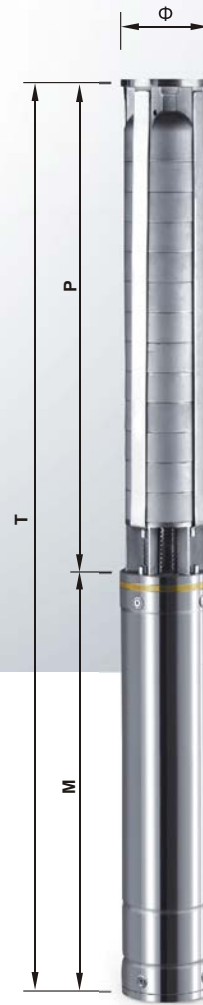


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 125QJ(G)-15T

PERFORMANCE CURVE

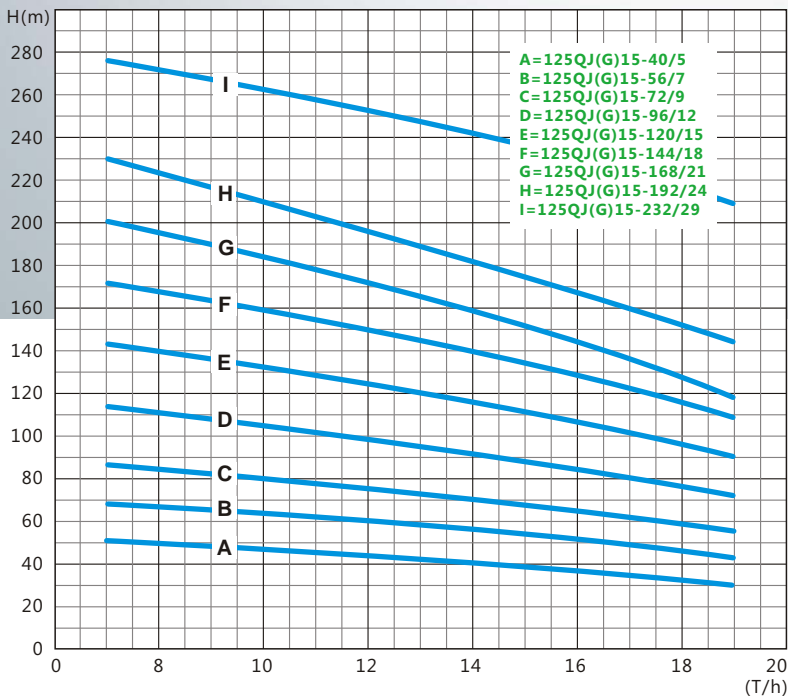

TECHNICAL DATA

Model	Power		Voltage V	Ampere A	Flow T/h	Capacity(Q) and Head(H)						Pump weight Kg	Total length T	Motor length M
	kW	HP				6	8	10	15	16	17			
125QJ(G)15-40/5	3	4	220/380	16.5/7.5	Head m	48	45	43	40	35	30	65	935	510
125QJ(G)15-56/7	4	5.5	220/380	21/9.5		67	63	60	56	49	42	72	1065	550
125QJ(G)15-72/9	5.5	7.5	220/380	26/13		86	81	77	72	63	54	80	1205	600
125QJ(G)15-96/12	7.5	10	380	16.5		114	108	102	96	84	72	88	1400	660
125QJ(G)15-120/15	9.2	12.5	380	20		143	135	128	120	105	90	98	1585	710
125QJ(G)15-144/18	11	15	380	25		171	162	153	144	126	108	108	1780	770
125QJ(G)15-168/21	13	17.5	380	29		200	189	179	168	147	126	118	1975	830
125QJ(G)15-192/24	15	20	380	34		228	216	204	192	168	144	128	2170	890
125QJ(G)15-232/29	18.5	25	380	42		276	261	247	232	208	178	140	2475	970