
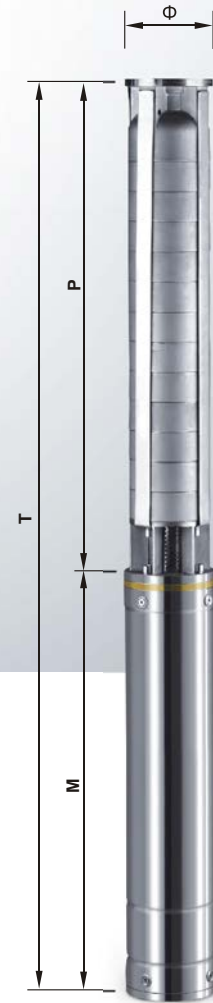


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 125QJ(G) -20T

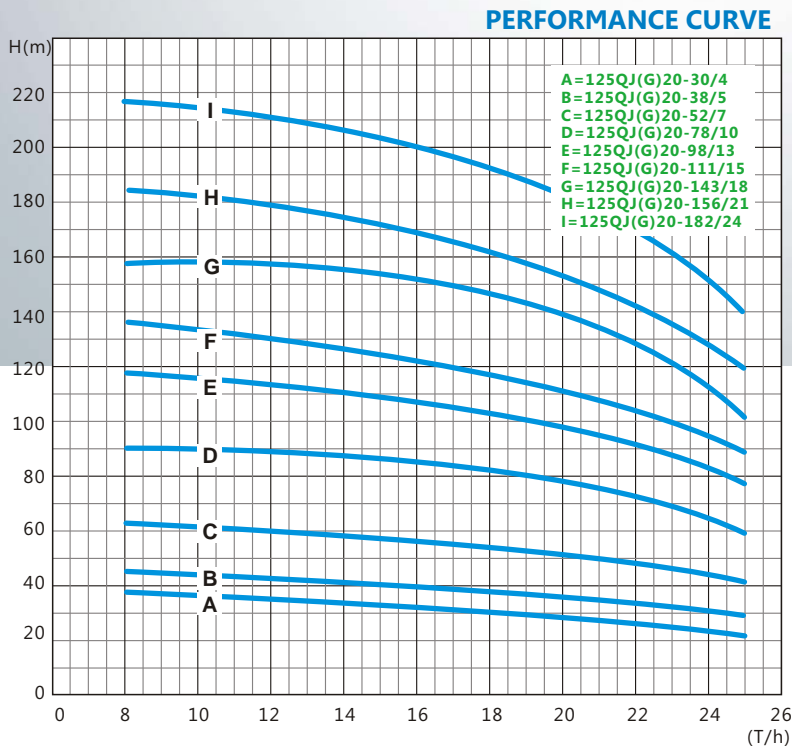

TECHNICAL DATA

Model	Power		Voltage V	Ampere A	Flow T/h	Capacity(Q) and Head(H)						Pump weight Kg	Total length T	Motor length M
	kW	HP				6	8	10	15	16	17			
125QJ(G)20-30/4	3	4	220/380	16.5/7.5		36	34	32	30	26	24	65	910	510
125QJ(G)20-38/5	4	5.5	220/380	21/9.5		45	43	40	38	33	30	72	1000	550
125QJ(G)20-52/7	5.5	7.5	220/380	26/13		63	60	56	52	46	42	80	1150	600
125QJ(G)20-78/10	7.5	10	380	16.5		90	85	80	78	65	60	88	1360	660
125QJ(G)20-98/13	9.2	12.5	380	20	Head m	117	111	104	98	85	78	98	1560	710
125QJ(G)20-111/15	11	15	380	25		135	128	120	111	98	90	108	1720	770
125QJ(G)20-143/18	13	17.5	380	29		162	153	145	143	117	108	118	1930	830
125QJ(G)20-156/21	15	20	380	34		189	179	168	156	137	126	128	2140	890
125QJ(G)20-182/24	18.5	25	380	42		216	204	192	182	156	144	140	2370	970