
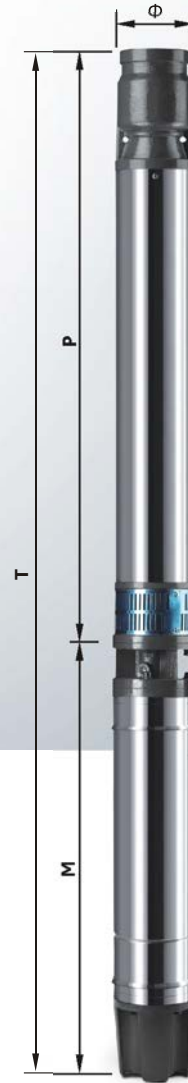


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 150QJ-32T

PERFORMANCE CURVE

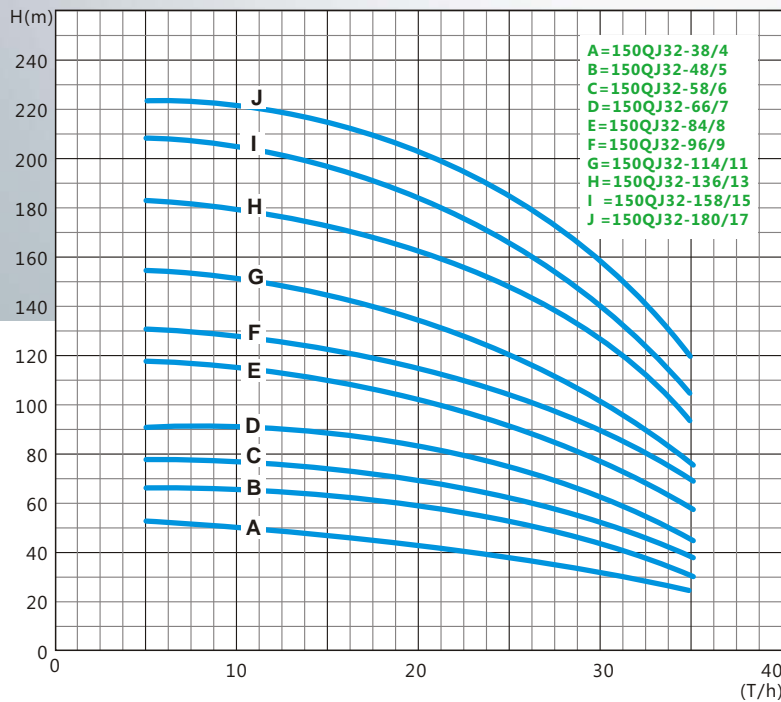

TECHNICAL DATA

Model	Power		Voltage V	Ampere A	Flow T/h	Capacity(Q) and Head(H)						Pump weight Kg	Total length T	Motor length M
	kW	HP				6	8	10	15	16	17			
150QJ32-38/4	5.5	7.5	380	12.5		52	50	48	46	38	26	58	1303	680
150QJ32-48/5	7.5	10	380	16.5		66	64	62	59	48	33	65	1397	720
150QJ32-58/6	9.2	12.5	380	20		78	75	72	69	58	39	73	1500	770
150QJ32-66/7	11	15	380	25		91	88	84	81	66	46	81	1553	770
150QJ32-84/8	13	17.5	380	29	Head m	117	112	108	103	84	59	89	1709	820
150QJ32-96/9	15	20	380	34		130	125	120	115	96	65	97	1834	870
150QJ32-114/11	18.5	25	380	41		156	150	144	138	114	78	105	1969	920
150QJ32-136/13	25	33.5	380	50		182	175	168	161	136	91	115	2135	980
150QJ32-158/15	30	40	380	58		208	200	192	184	158	104	122	2292	1030
150QJ32-180/17	37	50	380	68		234	226	218	207	180	119	130	2460	1090