
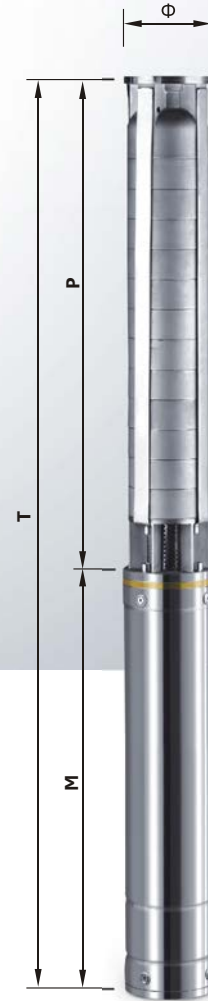


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 200QJ(G)-40T

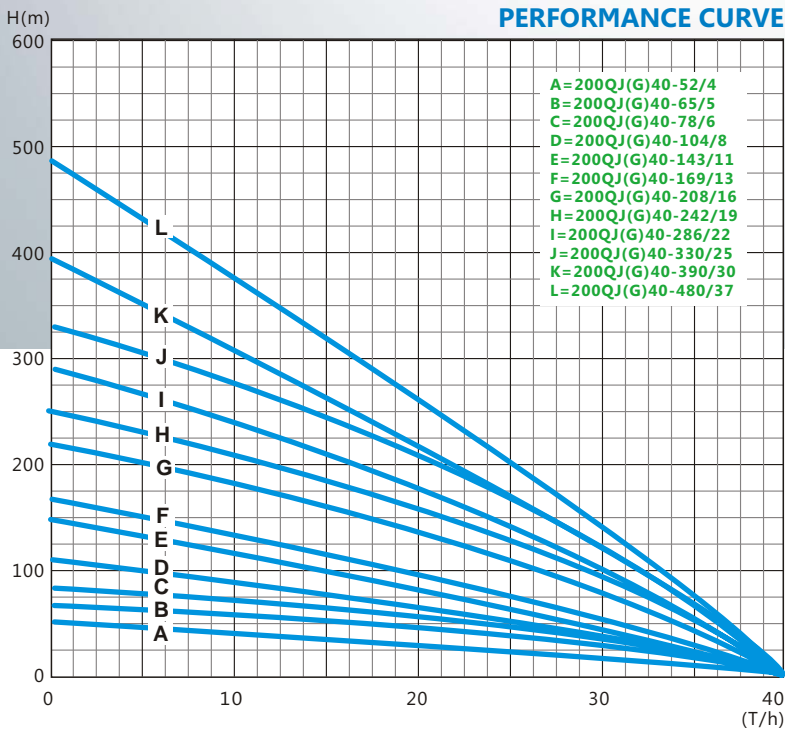

TECHNICAL DATA

| Model | Power | | Voltage (V) | Ampere (A) | Flow (T/h) | Head (m) | Efficiency | External diameter (mm) | Max. Flow (T/h) |
|-------------------|-------|-----|-------------|------------|------------|----------|------------|------------------------|-----------------|
| | kW | HP | | | | | | | |
| 200QJ(G)40-52/4 | 11 | 15 | 380 | 28 | 40 | 52 | 72 | 184 | 66 |
| 200QJ(G)40-65/5 | 15 | 20 | 380 | 35 | 40 | 65 | 72 | 184 | 66 |
| 200QJ(G)40-78/6 | 18.5 | 25 | 380 | 42 | 40 | 78 | 72 | 184 | 66 |
| 200QJ(G)40-104/8 | 22 | 30 | 380 | 48 | 40 | 104 | 72 | 184 | 66 |
| 200QJ(G)40-143/11 | 25 | 34 | 380 | 54 | 40 | 143 | 72 | 184 | 66 |
| 200QJ(G)40-169/13 | 30 | 40 | 380 | 62 | 40 | 169 | 72 | 184 | 66 |
| 200QJ(G)40-208/16 | 37 | 50 | 380 | 70 | 40 | 208 | 72 | 184 | 66 |
| 200QJ(G)40-242/19 | 45 | 60 | 380 | 80 | 40 | 242 | 72 | 184 | 66 |
| 200QJ(G)40-286/22 | 55 | 75 | 380 | 92 | 40 | 286 | 72 | 184 | 66 |
| 200QJ(G)40-330/25 | 63 | 85 | 380 | 103 | 40 | 330 | 72 | 184 | 66 |
| 200QJ(G)40-390/30 | 75 | 100 | 380 | 115 | 40 | 390 | 72 | 184 | 66 |
| 200QJ(G)40-480/37 | 90 | 120 | 380 | 135 | 40 | 480 | 72 | 184 | 66 |