
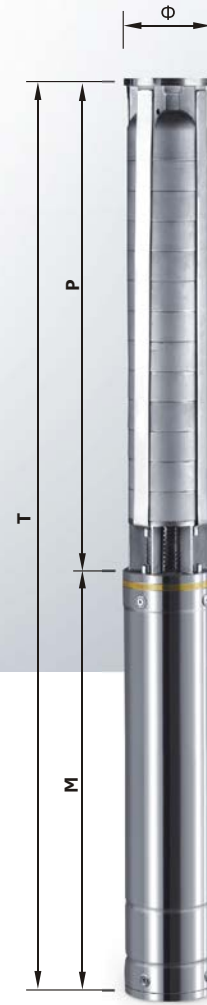


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 200QJ(G)-63T

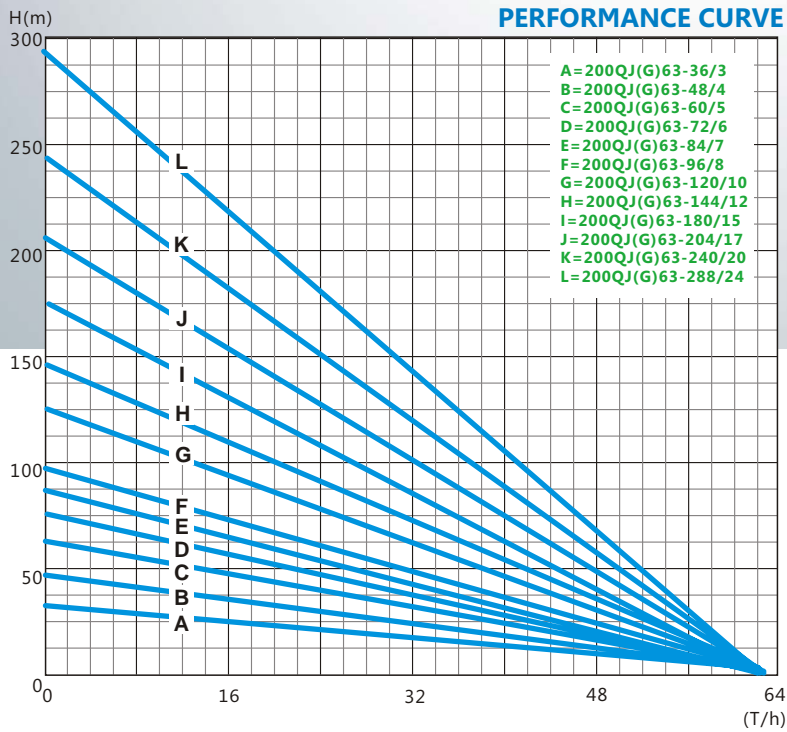

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Flow (T/h)	Head (m)	Efficiency	External diameter (mm)	Max. Flow (T/h)
	kW	HP							
200QJ(G)63-36/3	11	15	380	28	63	36	74	184	100
200QJ(G)63-48/4	15	20	380	35	63	48	74	184	100
200QJ(G)63-60/5	18.5	25	380	42	63	60	74	184	100
200QJ(G)63-72/6	22	30	380	48	63	72	74	184	100
200QJ(G)63-84/7	25	34	380	54	63	84	74	184	100
200QJ(G)63-96/8	30	40	380	62	63	96	74	184	100
200QJ(G)63-120/10	37	50	380	70	63	120	74	184	100
200QJ(G)63-144/12	45	60	380	80	63	144	74	184	100
200QJ(G)63-180/15	55	75	380	92	63	180	74	184	100
200QJ(G)63-204/17	63	85	380	103	63	204	74	184	100
200QJ(G)63-240/20	75	100	380	115	63	240	74	184	100
200QJ(G)63-288/24	90	120	380	135	63	288	74	184	100