
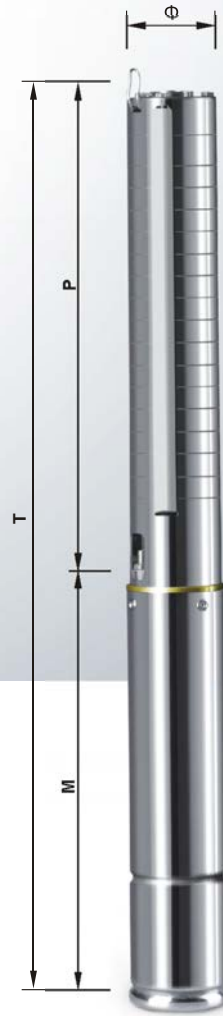


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 4SP(D)-2T

PERFORMANCE CURVE

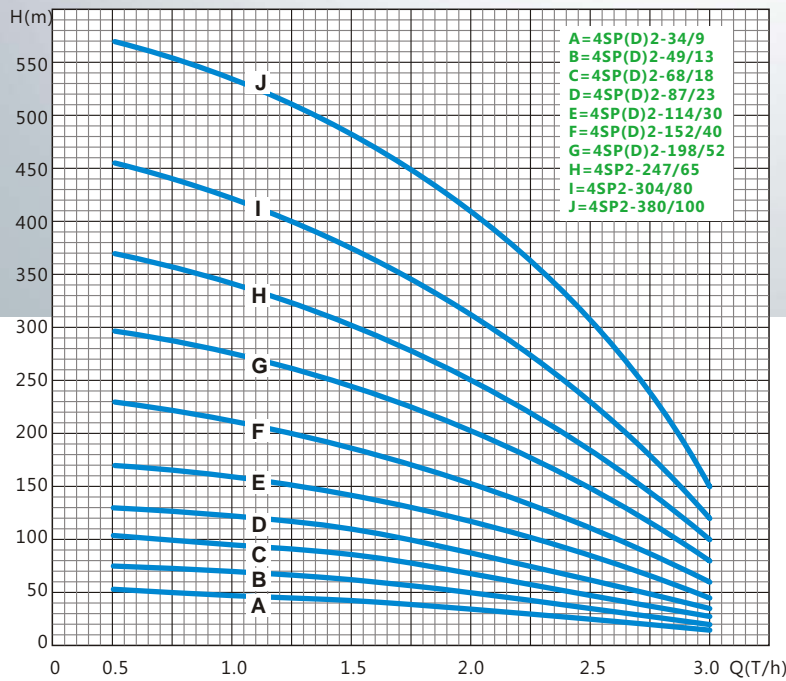

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)						Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)				
	kW	HP			H	Q	0.5	1	1.5	2			2.5	3	Total length T	Motor length M	Pump casing length P
4SPD2-34/9	0.37	0.5	220	3.6	H (m)	52	48	43	34	25	14	11	699	357	342	96	
4SPD2-49/13	0.55	0.75	220	4.4		74	69	62	49	35	20	12	798	372	426	96	
4SPD2-68/18	0.75	1	220	6.2		103	96	87	68	48	27	13	923	392	531	96	
4SPD2-87/23	1.1	1.5	220	8.5		131	122	111	87	62	35	16	1058	422	636	96	
4SPD2-114/30	1.5	2	220	10.6		171	159	144	114	81	45	19	1235	452	783	96	
4SPD2-152/40	2.2	3	220	12.5		228	212	192	152	108	60	23	1485	492	993	96	
4SPD2-198/52	3	4	220	16.5		297	276	250	198	141	78	29	1812	567	1245	96	
4SP2-34/9	0.37	0.5	380	1.8		52	48	43	34	25	14	1 1/4	10	689	347	342	96
4SP2-49/13	0.55	0.75	380	2.4		74	69	62	49	35	20		11	783	357	426	96
4SP2-68/18	0.75	1	380	3.2		103	96	87	68	49	27		12	903	372	531	96
4SP2-87/23	1.1	1.5	380	4.2		131	122	111	87	62	35		15	1028	392	636	96
4SP2-114/30	1.5	2	380	5.3		171	159	144	114	81	45		18	1205	422	783	96
4SP2-152/40	2.2	3	380	6.5		228	212	192	152	108	60		21	1445	452	993	96
4SP2-198/52	3	4	380	7.5		297	276	250	198	141	78		27	1737	492	1245	96
4SP2-247/65	4	5.5	380	9.5	371	345	312	247	176	98	32		2085	567	4560	96	
4SP2-304/80	5.5	7.5	380	12.5	456	424	384	304	216	120	38		2527	652	1875	96	
4SP2-380/100	7.5	10	380	16	570	560	480	380	270	150	45		3037	742	2295	96	