
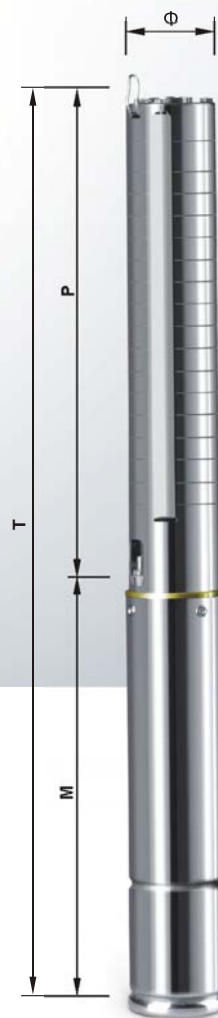


# STAINLESS STEEL SUBMERSIBLE PUMP

## MODEL 4SP(D)-3T

PERFORMANCE CURVE

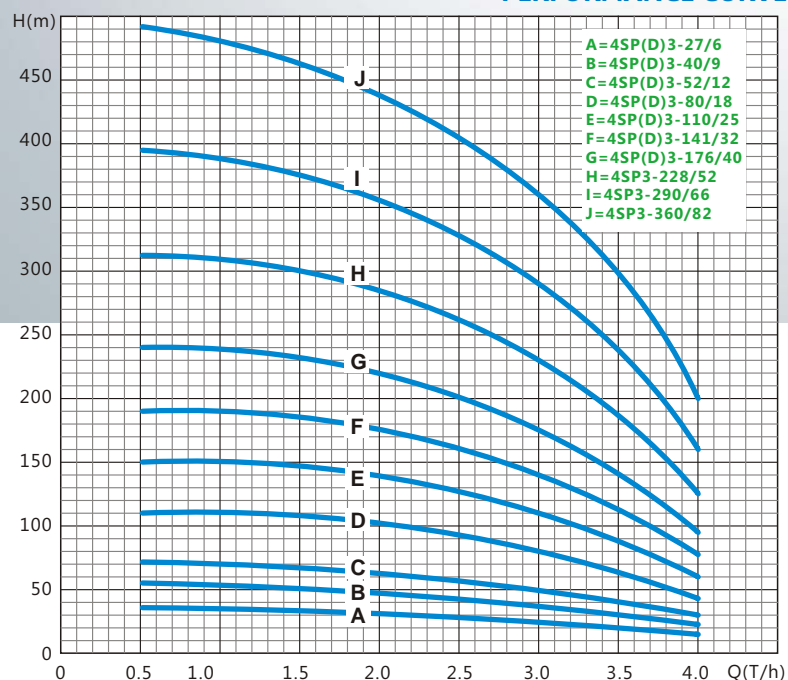

### TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)						Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)				
	kW	HP			H m	Q T/h	0.5	1	1.5	2			2.5	3	Total length T	Motor length M	Pump casing length P
4SPD3-27/6	0.37	0.5	220	3.6	H (m)	36	33	31	27	22	14	11	636	357	279	96	
4SPD3-40/9	0.55	0.75	220	4.4		54	50	46	40	34	22	12	714	372	342	96	
4SPD3-52/12	0.75	1	220	6.5		72	66	61	52	45	29	13	797	392	405	96	
4SPD3-80/18	1.1	1.5	220	8.5		108	99	92	80	67	43	16	953	422	531	96	
4SPD3-110/25	1.5	2	220	10.6		150	138	128	110	93	60	19	1130	452	678	96	
4SPD3-141/32	2.2	3	220	12.5		192	176	163	141	118	77	23	1317	492	825	96	
4SPD3-176/40	3	4	220	16.5		240	220	204	176	148	96	29	1560	567	993	96	
4SP3-27/6	0.37	0.5	380	1.8		1 1/4	36	33	31	27	22	14	10	626	347	279	96
4SP3-40/9	0.55	0.75	380	2.4			54	50	46	40	34	22	11	699	357	342	96
4SP3-52/12	0.75	1	380	3.2			72	66	61	52	45	29	12	777	372	405	96
4SP3-80/18	1.1	1.5	380	4.2			108	99	92	80	67	43	15	923	392	531	96
4SP3-110/25	1.5	2	380	5.3			150	138	128	110	93	60	18	1100	422	678	96
4SP3-141/32	2.2	3	380	6.5	192		176	163	141	118	77	21	1277	452	825	96	
4SP3-176/40	3	4	380	7.5	240		220	204	176	148	96	27	1458	492	993	96	
4SP3-228/52	4	5.5	380	9.5	312		286	265	228	192	125	32	1812	567	1245	96	
4SP3-290/66	5.5	7.5	380	12.5	396		363	330	290	244	158	38	2191	652	1539	96	
4SP3-360/82	7.5	10	380	16	492		451	410	360	303	197	45	2617	742	1875	96	