
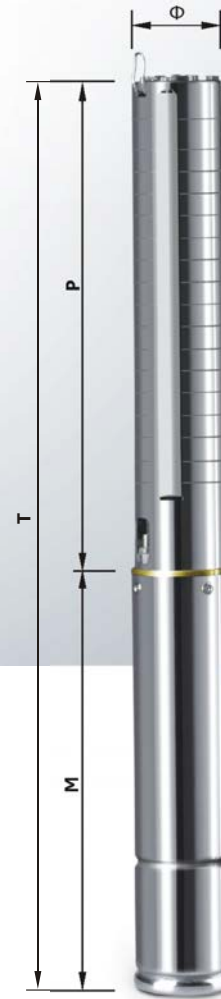


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 4SP(D)-5T

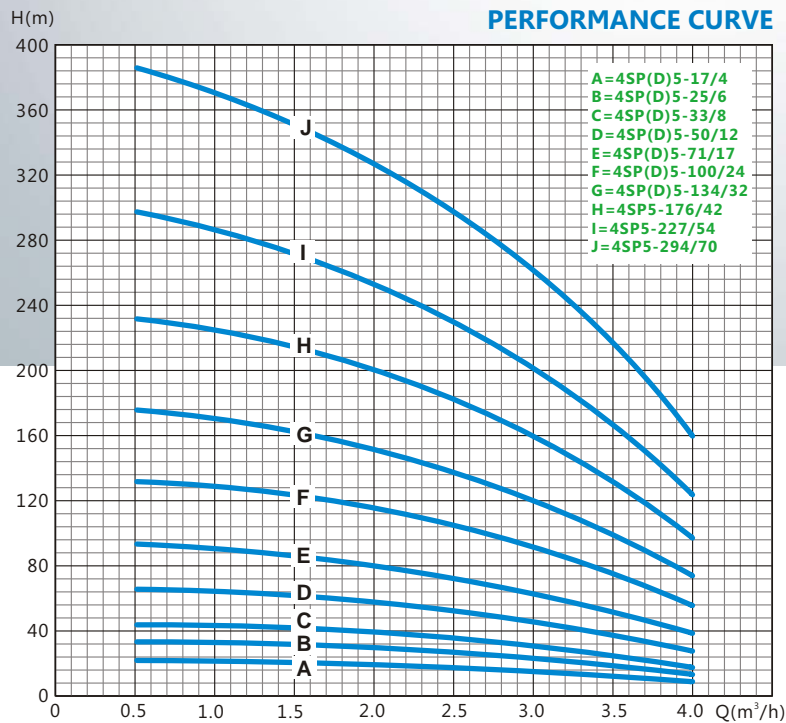

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)						Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)				
	kW	HP			H m	Q m³/h	0.5	1	2	3			3.5	4	Total length T	Motor length M	Pump casing length P
4SPD5-17/4	0.37	0.5	220	3.6	H (m)	22	21	19	17	12	9	11	606	357	249	96	
4SPD5-25/6	0.55	0.75	220	4.4		33	32	28	25	18	14	12	669	372	297	96	
4SPD5-33/8	0.75	1	220	6.2		44	42	38	33	24	18	13	737	392	345	96	
4SPD5-50/12	1.1	1.5	220	8.5		66	64	56	50	36	28	15	863	422	441	96	
4SPD5-71/17	1.5	2	220	10.6		94	90	80	71	51	39	18	1013	452	561	96	
4SPD5-100/24	2.2	3	220	12.5		132	127	113	100	72	55	22	1221	492	729	96	
4SPD5-134/32	3	4	220	16.5		176	170	150	134	96	74	26	1488	567	921	96	
4SP5-17/4	0.37	0.5	380	1.8		22	21	19	17	12	9	1 1/2	10	596	347	249	96
4SP5-25/6	0.55	0.75	380	2.4		33	32	28	25	18	14		11	654	357	297	96
4SP5-33/8	0.75	1	380	3.2		44	42	38	33	24	18		12	717	372	345	96
4SP5-50/12	1.1	1.5	380	4.2		66	64	56	50	36	28		15	833	392	441	96
4SP5-71/17	1.5	2	380	5.3		94	90	80	71	51	39		17	983	422	561	96
4SP5-100/24	2.2	3	380	6.5		132	127	113	100	72	55		21	1181	452	729	96
4SP5-134/32	3	4	380	7.5		176	170	150	134	96	74		25	1413	492	921	96
4SP5-176/42	4	5.5	380	9.5		231	223	197	176	126	97		30	1728	567	1161	96
4SP5-227/54	5.5	7.5	380	12.5		297	286	254	227	162	124		36	2101	652	1449	96
4SP5-294/70	7.5	10	380	16	385	371	329	294	210	161	44		2575	742	1883	96	