
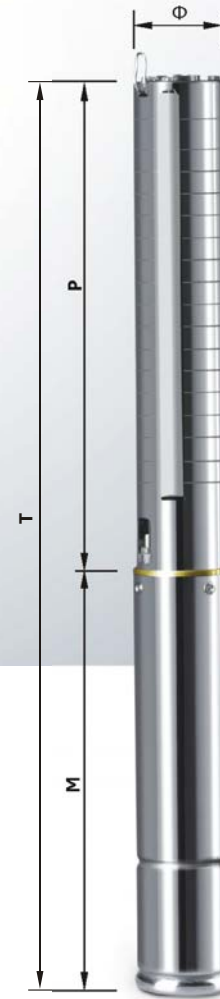


# STAINLESS STEEL SUBMERSIBLE PUMP

## MODEL 4SP(D)-8T

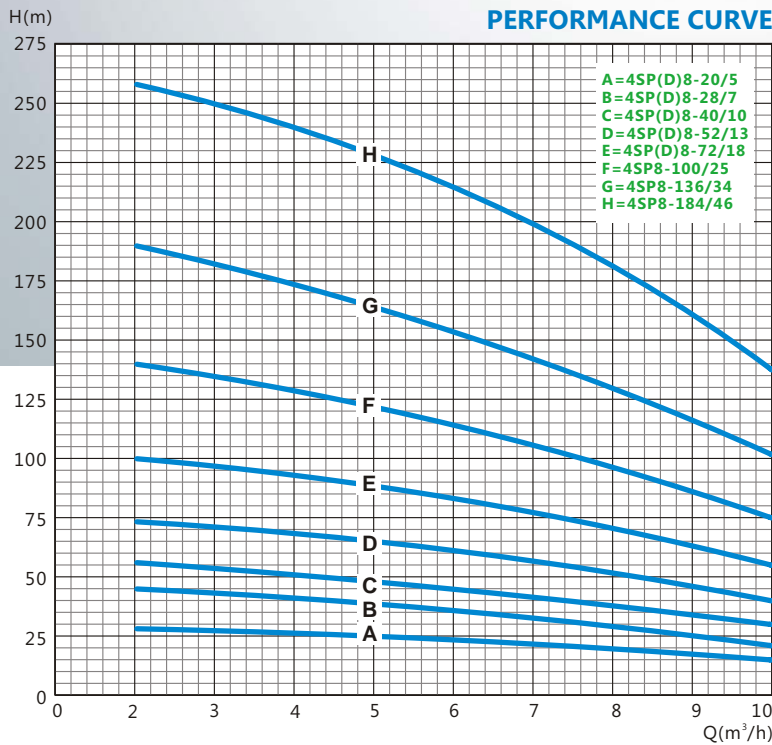

### TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)						Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)				
	kW	HP			H m	Q m³/h	0.5	1	2	3			3.5	4	Total length T	Motor length M	Pump casing length P
4SPD8-20/5	0.75	1	220	6.2		28	25	23	20	18	15	15	782	392	390	96	
4SPD8-28/7	1.1	1.5	220	8.5		39	35	32	28	25	21	17	896	422	474	96	
4SPD8-40/10	1.5	2	220	10.6		56	50	45	40	35	30	19	1052	452	600	96	
4SPD8-52/13	2.2	3	220	12.5		73	65	59	52	46	39	22	1218	492	726	96	
4SPD8-72/18	3	4	220	16.5		101	90	81	72	63	54	26	1503	567	936	96	
4SP8-20/5	0.75	1	380	3.2	H (m)	28	25	23	20	18	15	1 1/2	14	762	372	390	96
4SP8-28/7	1.1	1.5	380	4.2		39	35	32	28	25	21		16	866	392	474	96
4SP8-40/10	1.5	2	380	5.3		56	50	45	40	35	30		18	1022	422	600	96
4SP8-52/13	2.2	3	380	6.5		73	65	59	52	46	39		21	1178	452	726	96
4SP8-72/18	3	4	380	7.5		101	90	81	72	63	54		25	1428	492	936	96
4SP8-100/25	4	5.5	380	9.5		140	125	113	100	88	75		30	1887	567	1230	96
4SP8-136/34	5.5	7.5	380	12.5		190	170	153	136	119	102		36	2260	652	1608	96
4SP8-184/46	7.5	10	380	16		258	230	207	184	161	138		44	2854	742	2112	96