
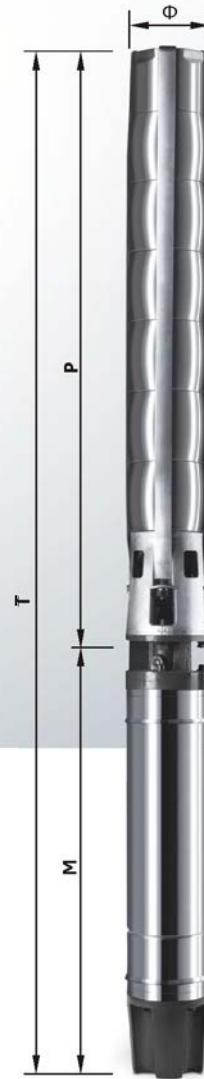


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 6SP-30T

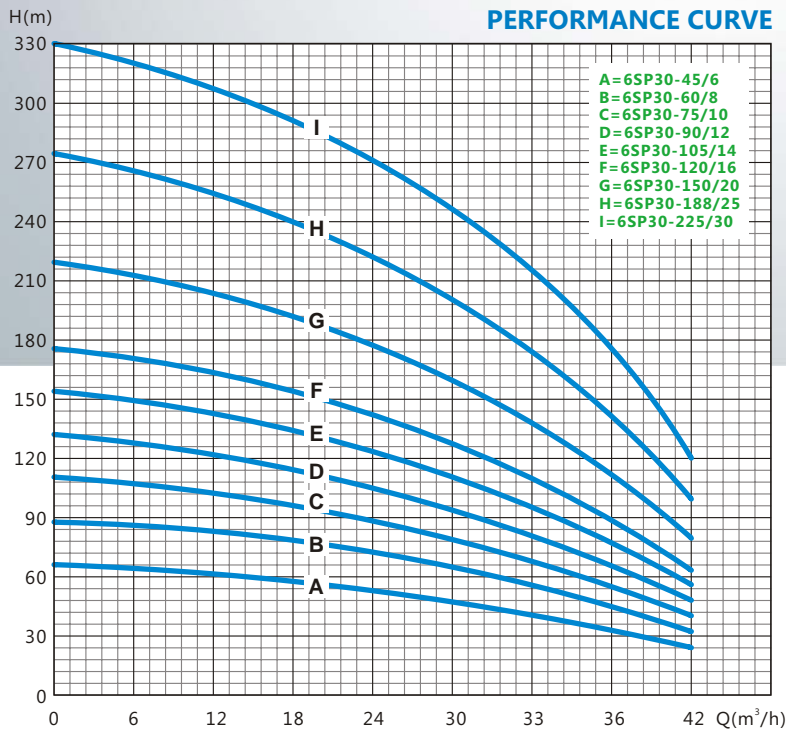

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)									Pipe Dia	Pump weight (Kg)	Total weight (Kg)	Boundary dimension (mm)		
	kW	HP			H (m)	Q (m³/h)	0	6	12	18	24	30	33				36	42	Pump casing length P
6SP30-45/6	5.5	7.5	380	12.5	H (m)	66	64	61	57	52	45	41	35	24	17	63	810	1426	143
6SP30-60/8	7.5	10	380	16.5		88	85	81	77	70	60	54	47	32	21	70	990	1656	143
6SP30-75/10	9.2	12.5	380	20		110	106	102	96	87	75	68	59	40	26	78	1170	1886	143
6SP30-90/12	11	15	380	25		132	128	122	115	104	90	81	71	48	30	89	1350	2136	143
6SP30-105/14	13	17.5	380	29		154	149	142	134	122	105	95	83	56	34	96	1530	2366	143
6SP30-120/16	15	20	380	34		175	170	163	153	139	120	108	94	63	39	105	1710	2596	143
6SP30-150/20	18.5	25	380	41		219	213	203	191	174	150	135	118	79	48	119	2070	2981	143
6SP30-188/25	22	30	380	50		274	266	254	239	218	188	169	148	99	59	138	2520	3506	143
6SP30-225/30	25	33.5	380	58		329	319	305	287	261	225	203	177	119	70	154	2970	4031	143