
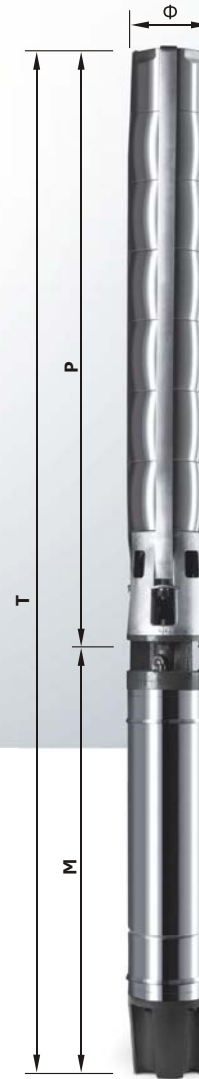


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 6SP-46T

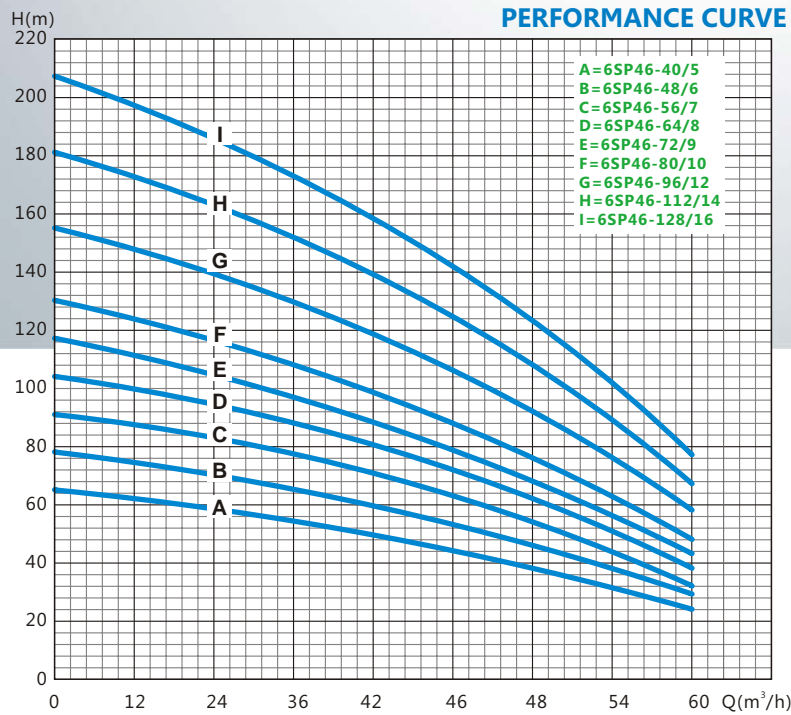

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)											Pipe Dia	Pump weight (Kg)	Total weight (Kg)	Boundary dimension (mm)		
	kW	HP			Q (m³/h)	0	12	24	36	42	46	48	54	60	Pump casing length P				Total length T	Pump casing external diameter Φ(mm)	
6SP46-40/5	7.5	10	380	16.5	H (m)	65	61	56	49	44	40	38	32	24	15	64	720	1386	143		
6SP46-48/6	9.2	12.5	380	20		78	74	67	59	53	48	46	38	29	17	69	810	1526	143		
6SP46-56/7	11	15	380	25		91	86	79	69	62	56	54	44	22	19	78	900	1686	143		
6SP46-64/8	13	17.5	380	29		104	98	90	78	71	64	62	51	38	21	83	990	1926	143		
6SP46-72/9	15	20	380	34		117	111	101	88	80	72	69	57	43	23	89	1080	1966	143		
6SP46-80/10	15	20	380	34		130	123	112	98	88	80	77	63	48	26	92	1170	2056	143		
6SP46-96/12	18.5	25	380	41		155	148	135	118	106	96	92	76	58	30	101	1350	2261	143		
6SP46-112/14	22	30	380	50		181	172	158	137	124	112	108	89	67	34	113	1530	2516	143		
6SP46-128/16	25	33.5	380	58		207	197	180	157	142	128	123	102	77	39	123	1710	2771	143		