
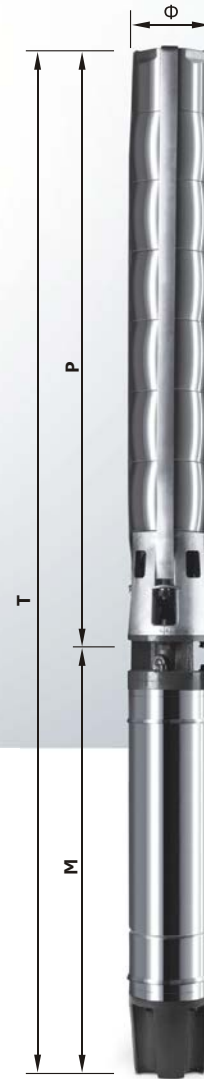


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 6SP-60T

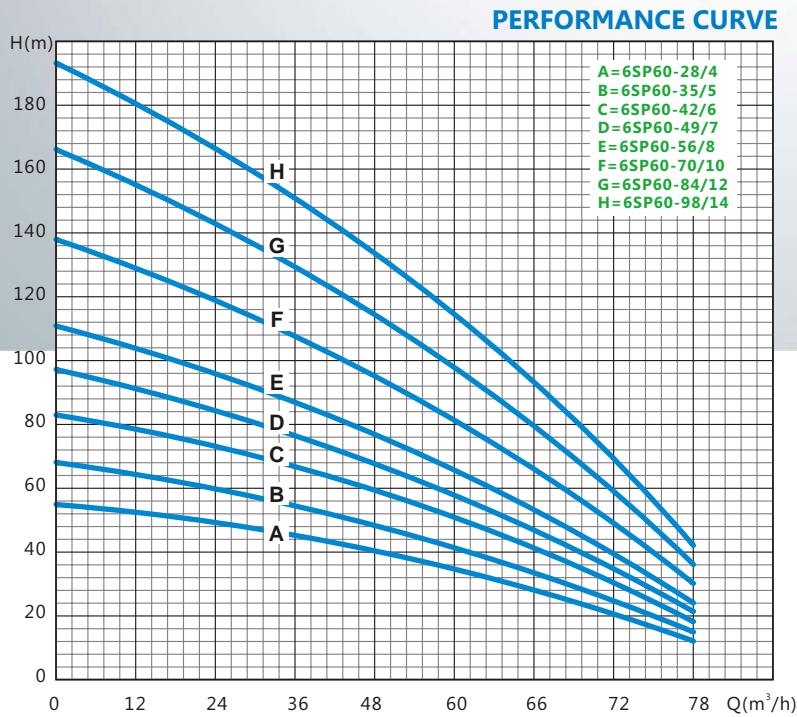

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)												Pipe Dia	Pump weight (Kg)	Total weight (Kg)	Boundary dimension (mm)		
	kW	HP			Q (m³/h)	H (m)	0	12	24	36	48	60	66	72	78	Pump casing length P				Total length T	Pump casing external diameter Φ(mm)	
6SP60-28/4	7.5	10	380	16.5	55	53	49	42	35	28	24	19	12	13	62	670	1366	143				
6SP60-35/5	9.2	12.5	380	20	68	66	61	53	43	35	30	23	15	16	68	770	1486	143				
6SP60-42/6	11	15	380	25	83	80	73	63	52	42	36	28	18	18	77	870	1656	143				
6SP60-49/7	13	17.5	380	29	97	93	85	74	60	49	42	32	21	20	82	970	1806	143				
6SP60-56/8	15	20	380	34	111	107	98	84	69	56	48	37	24	23	89	1070	1956	143				
6SP60-70/10	18.5	25	380	41	138	133	122	105	86	70	60	46	30	28	99	1270	2181	143				
6SP60-84/12	22	30	380	50	166	160	146	126	104	84	72	56	36	32	111	1470	2456	143				
6SP60-98/14	25	33.5	380	58	193	186	171	147	121	98	84	65	42	37	121	1670	2731	143				