



SCREW SUBMERSIBLE PUMP

MODEL QGD

MODEL INSTRUCTION

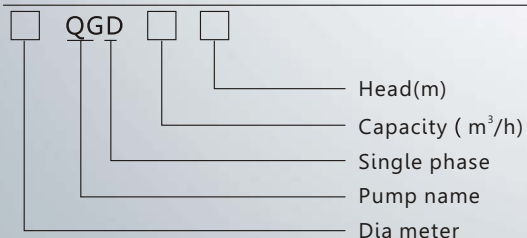

PERFORMANCE CURVE

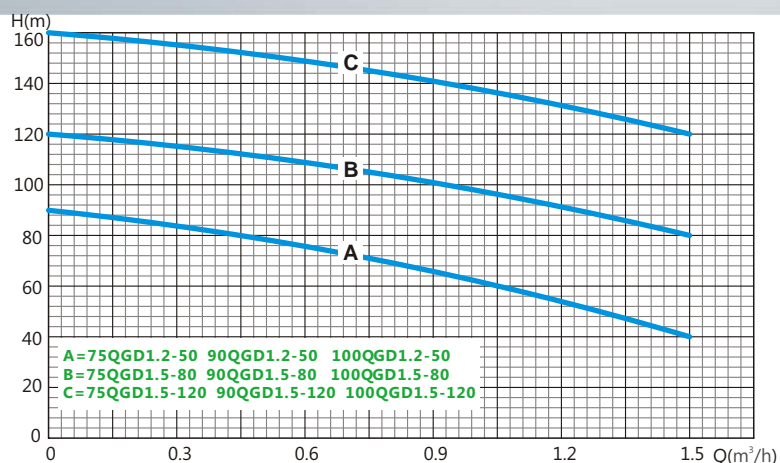

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)						Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)	
	kW	HP			H m	Q m ³ /h	0	0.5	0.8	1			1.2	1.5
75QGD1.2-50	0.37	0.5	220	3.8		90	80	70	60	50	40	12	620	72
75QGD1.5-80	0.55	0.75	220	4.8		120	110	105	100	90	80	13	650	72
75QGD1.5-120	0.75	1	220	6.5		160	145	135	130	125	120	14	700	72
90QGD1.2-50	0.37	0.5	220	3.8		90	80	70	60	50	40	13	580	90
90QGD1.5-80	0.55	0.75	220	4.8	H (m)	120	110	105	100	90	80	14	610	90
90QGD1.5-120	0.75	1	220	6.5		160	145	135	130	125	120	15	660	90
100QGD1.2-50	0.37	0.5	220	3.8		90	80	70	60	50	40	13	580	96
100QGD1.5-80	0.55	0.75	220	4.8		120	110	105	100	90	80	14	610	96
100QGD1.5-120	0.75	1	220	6.5		160	145	135	130	125	120	15	660	96