


PERIPHERAL SUBMERSIBLE PUMP


MODEL 4SK(M)



MODEL INSTRUCTION

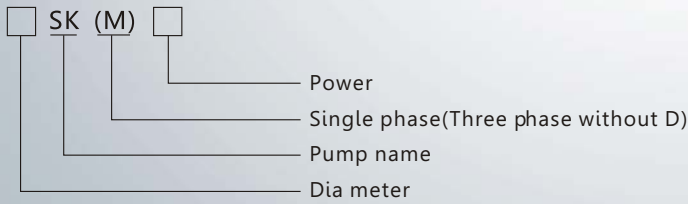

PERFORMANCE CURVE

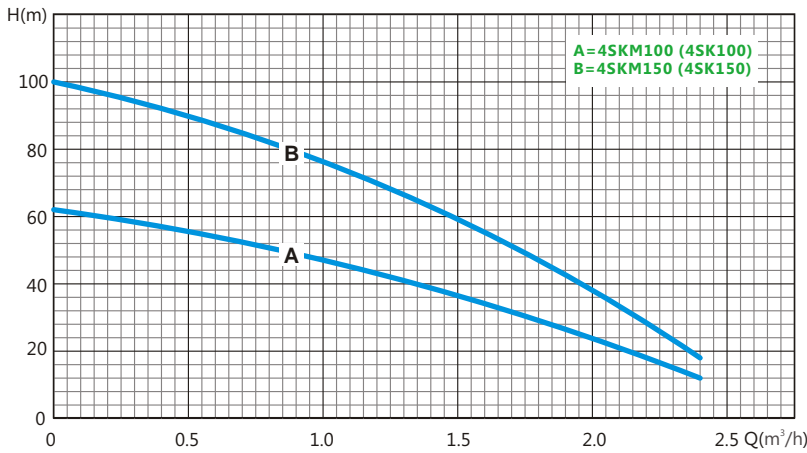

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)						Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)	
	kW	HP			H	Q	0	0.5	1	1.5			2	2.4
4SKM100	0.75	1	220	5.8	H	62	50	40	28	18	12	16	490	96
4SKM150	1.1	1.5	220	7.2	H	100	80	60	40	25	18	19	520	96
4SK100	0.75	1	380	2.8	(m)	62	50	40	28	18	12	15	470	96
4SK150	1.1	1.5	380	3.8	(m)	100	80	60	40	25	18	18	490	96