

# STAINLESS STEEL


## UNDER-SUCTION BUILT-IN SUBMERSIBLE PUMP

### MODEL

# 90QNX(D)Y



PERFORMANCE CURVE

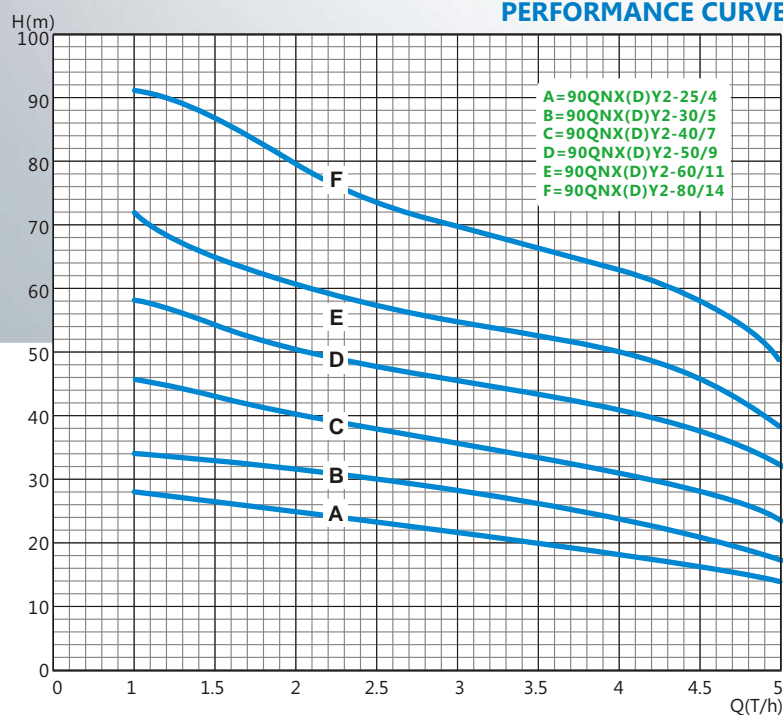

### TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Q T/h	Capacity(Q) and Head(H)					Pump weight (Kg)	Total length T	
	kW	HP				1	1.5	2	3	4			5
90QNX(D)Y2-25/4	0.25	0.33	220/380	2.4/1.1		28	27	25	20	17.5	14	6	444
90QNX(D)Y2-30/5	0.37	0.5	220/380	3.2/1.6		34	32	30	25	23	17	7	500
90QNX(D)Y2-40/7	0.55	0.75	220/380	4/2		46	43	40	35	32	24	8	602
90QNX(D)Y2-50/9	0.75	1	220/380	5.8/2.8	H (m)	58	54	50	45	41	32	9	704
90QNX(D)Y2-60/11	1.1	1.5	220/380	7.8/3.6		72	65	60	55	50	38	10	806
90QNX(D)Y2-80/14	1.5	2	220/380	9.5/4.5		91	84	80	70	63	49	11	954