


STAINLESS STEEL

UNDER-SUCTION BUILT-IN SUBMERSIBLE PUMP

MODEL

130QNX(D)Y-2T

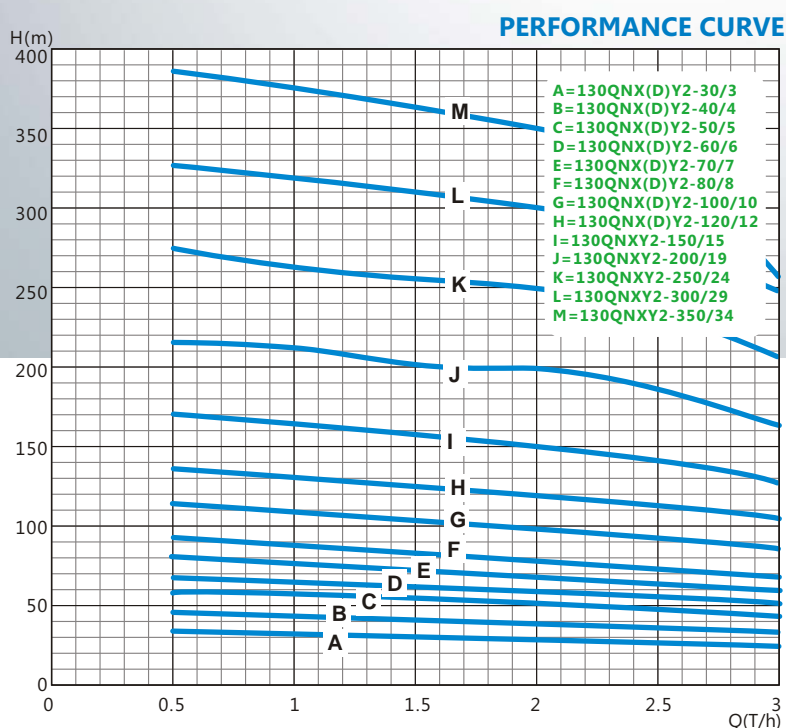

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Q T/h	Capacity(Q) and Head(H)						Pump weight (Kg)	Total length T
	kW	HP				0.5	1	1.5	2	2.5	3		
130QNX(D)Y2-30/3	0.55	0.75	220/380	4.2/2.1	H (m)	34	33	31.5	30	28	25	13	435
130QNX(D)Y2-40/4	0.75	1	220/380	5.6/2.7		45.5	44	45	40	37.5	34	15	470
130QNX(D)Y2-50/5	0.95	1.3	220/380	6.5/3.2		56.5	55	52.5	50	47	43	17	505
130QNX(D)Y2-60/6	1.1	1.5	220/380	8.2/4.1		68	66	63	60	57	51	19	545
130QNX(D)Y2-70/7	1.3	1.75	220/380	9.5/4.6		80	77	74	70	66	60	21	585
130QNX(D)Y2-80/8	1.5	2	220/380	11/5.1		91	88	84	80	76	68	24	630
130QNX(D)Y2-100/10	2.2	3	220/380	13/6.5		113	110	105	100	94	85	27	710
130QNX(D)Y2-120/12	3	4	220/380	17/7.5		136	132	126	120	113	102	30	810
130QNX(Y)2-150/15	4	5.5	380	9.5		170	165	158	150	141	128	33	885
130QNX(Y)2-200/19	5.5	7.5	380	12.5		215	209	200	200	179	162	36	1045
130QNX(Y)2-250/24	7.5	10	380	16.5		272	264	252	250	226	204	40	1230
130QNX(Y)2-300/29	9.2	12.5	380	20		328	319	305	300	273	247	45	1415
130QNX(Y)2-350/34	11	15	380	23		385	374	357	350	320	256	50	1600