


STAINLESS STEEL

UNDER-SUCTION BUILT-IN SUBMERSIBLE PUMP

MODEL

130QNX(D)Y-6T

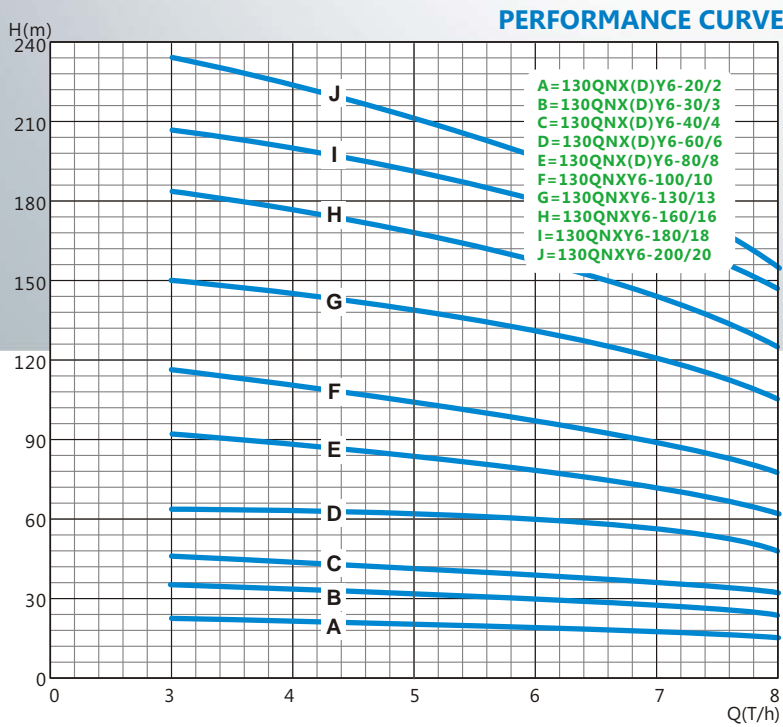

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Q T/h	Capacity(Q) and Head(H)						Pump weight (Kg)	Total length T
	kW	HP				3	4	5	6	7	8		
130QNX(D)Y6-20/2	0.75	1	220/380	5.6/2.7	H (m)	23	22	21	20	18	16	15	460
130QNX(D)Y6-30/3	1.1	1.5	220/380	8.2/4.1		35	33	32	30	27	24	19	520
130QNX(D)Y6-40/4	1.5	2	220/380	11/5.1		46	44	42	40	36	32	24	590
130QNX(D)Y6-60/6	2.2	3	220/380	13/6.5		69	66	63	60	54	48	27	690
130QNX(D)Y6-80/8	3	4	220/380	17/7.5		92	88	84	80	72	64	30	790
130QNX(Y)6-100/10	4	5.5	380	9.5		115	110	105	100	90	80	33	860
130QNX(Y)6-130/13	5.5	7.5	380	12.5		150	143	137	130	117	104	36	1015
130QNX(Y)6-160/16	7.5	10	380	16.5		184	176	168	160	144	128	40	1180
130QNX(Y)6-180/18	9.2	12.5	380	20		207	198	189	180	162	144	45	1310
130QNX(Y)6-200/20	11	15	380	24		230	220	210	200	180	160	50	1440