


STAINLESS STEEL

UNDER-SUCTION BUILT-IN SUBMERSIBLE PUMP

MODEL

135QNX(D)Y-20T

PERFORMANCE CURVE

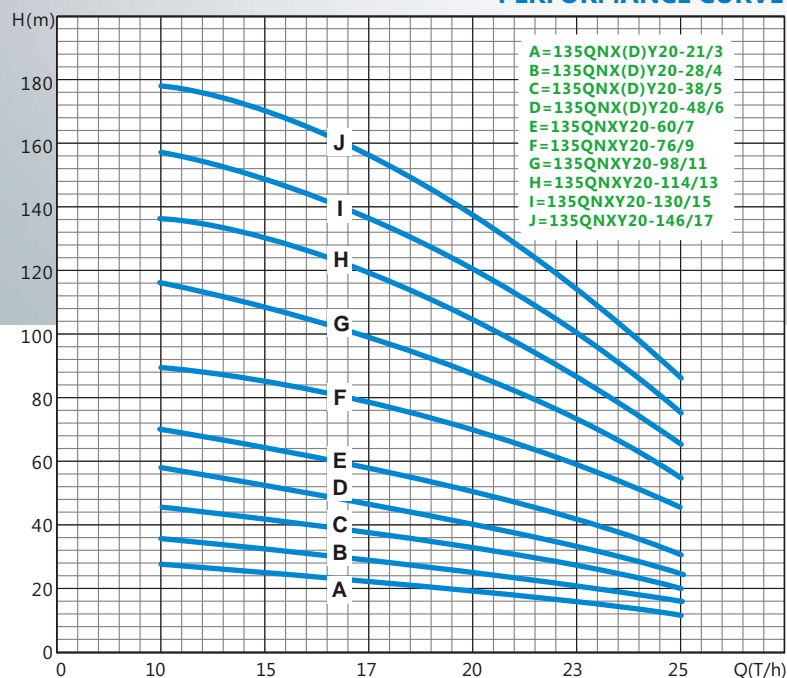

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Q T/h	Capacity(Q) and Head(H)					Pump weight (Kg)	Total length T	
	kW	HP				10	15	17	20	23			25
135QNX(D)Y20-21/3	1.5	2	220/380	10/4.7		27	24	23	21	15	12	20	735
135QNX(D)Y20-28/4	2.2	3	220/380	13/6.5		36	32	31	28	20	16	24	810
135QNX(D)Y20-38/5	3	4	220/380	16/7.8		45	42	40	38	25	20	28	890
135QNX(D)Y20-48/6	4	5.5	220/380	20/9.5		57	54	52	48	30	24	32	940
135QNX(Y)20-60/7	5.5	7.5	380	12.5	H (m)	70	67	63	60	38	32	37	1028
135QNX(Y)20-76/9	7.5	10	380	16.5		91	86	81	76	52	45	42	1180
135QNX(Y)20-98/11	9.2	12.5	380	20		116	110	104	98	66	55	47	1335
135QNX(Y)20-114/13	11	15	380	25		136	130	123	114	78	65	52	1525
135QNX(Y)20-130/15	13	17.5	380	29		157	150	142	130	90	75	57	1640
135QNX(Y)20-146/17	15	20	380	34		178	161	153	146	114	85	63	1790