


STAINLESS STEEL

UNDER-SUCTION BUILT-IN SUBMERSIBLE PUMP

MODEL

135QNX(D)Y-30T

PERFORMANCE CURVE

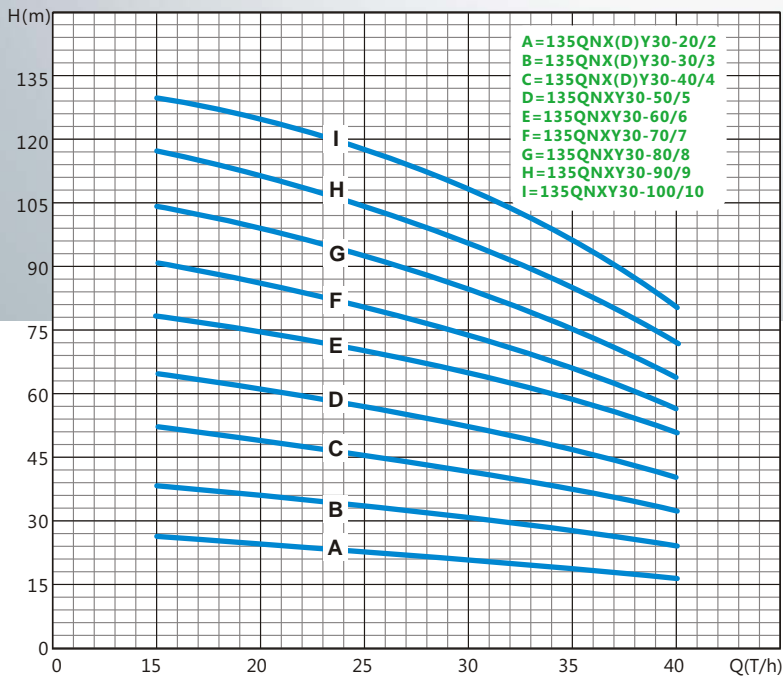

TECHNICAL DATA

| Model | Power | | Voltage (V) | Ampere (A) | Q T/h | Capacity(Q) and Head(H) | | | | | | Pump weight (Kg) | Total length T |
|--------------------|-------|------|-------------|------------|-------|-------------------------|-----|-----|-----|----|----|------------------|----------------|
| | kW | HP | | | | 15 | 20 | 25 | 30 | 35 | 40 | | |
| 135QNX(D)Y30-20/2 | 2.2 | 3 | 220/380 | 13/6.5 | H (m) | 26 | 24 | 22 | 20 | 8 | 16 | 23 | 690 |
| 135QNX(D)Y30-30/3 | 3 | 4 | 220/380 | 16/7.8 | | 39 | 36 | 33 | 30 | 27 | 24 | 27 | 775 |
| 135QNX(D)Y30-40/4 | 4 | 5.5 | 220/380 | 20/9.5 | | 52 | 48 | 44 | 40 | 36 | 32 | 31 | 830 |
| 135QNX(Y)30-50/5 | 5.5 | 7 | 380 | 12.5 | | 65 | 60 | 55 | 50 | 45 | 40 | 36 | 935 |
| 135QNX(Y)30-60/6 | 7.5 | 10 | 380 | 16.5 | | 78 | 72 | 66 | 60 | 54 | 48 | 41 | 1050 |
| 135QNX(Y)30-70/7 | 9.2 | 12.5 | 380 | 20 | | 91 | 84 | 77 | 70 | 63 | 56 | 46 | 1160 |
| 135QNX(Y)30-80/8 | 11 | 15 | 380 | 25 | | 104 | 96 | 88 | 80 | 72 | 64 | 51 | 1275 |
| 135QNX(Y)30-90/9 | 13 | 17.5 | 380 | 29 | | 117 | 108 | 99 | 90 | 81 | 72 | 56 | 1390 |
| 135QNX(Y)30-100/10 | 15 | 20 | 380 | 34 | | 130 | 120 | 110 | 100 | 90 | 80 | 62 | 1500 |