


STAINLESS STEEL

UNDER-SUCTION BUILT-IN SUBMERSIBLE PUMP

MODEL

180QNX

PERFORMANCE CURVE

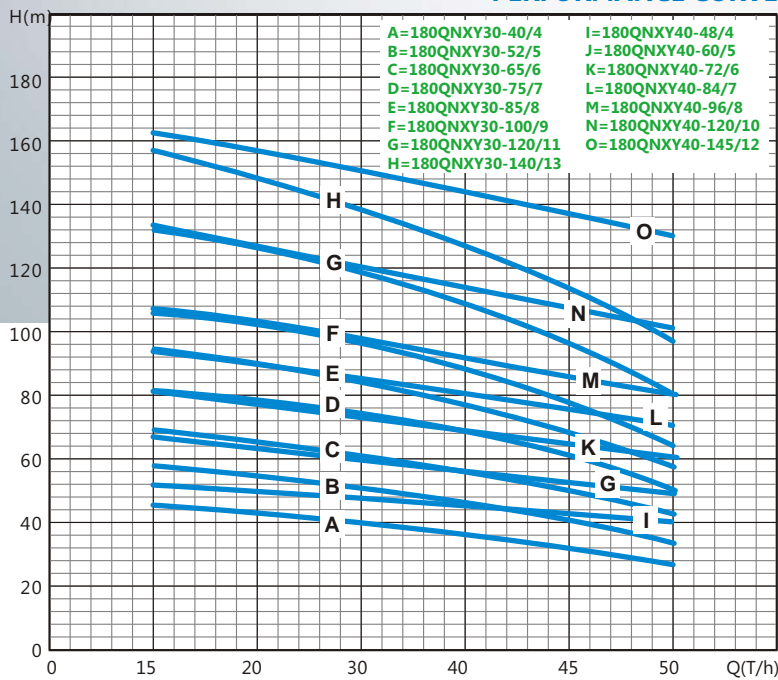

TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Q T/h	Capacity(Q) and Head(H)						Pump weight (Kg)	Total length T
	kW	HP				15	20	30	40	45	50		
180QNX30-40/4	5.5	7.5	380	12.5	H (m)	45	42	40	36	32	28	60	745
180QNX30-52/5	7.5	10	380	16.5		58	55	52	45	40	35	65	845
180QNX30-65/6	9.2	12.5	380	20		69	67	65	54	48	42	70	950
180QNX30-75/7	11	15	380	24		81	78	75	64	57	50	75	1055
180QNX30-85/8	13	17.5	380	28		95	90	85	74	65	58	80	1160
180QNX30-100/9	15	20	380	32		106	103	100	92	73	64	90	1265
180QNX30-120/11	18.5	25	380	40		132	126	120	101	90	80	100	1445
180QNX30-140/13	22	30	380	46		156	148	140	123	110	97	110	1625
180QNX40-48/4	7.5	10	380	16.5		54	52	50	48	44	40	65	800
180QNX40-60/5	9.2	12.5	380	20		68	65	63	60	55	50	70	910
180QNX40-72/6	11	15	380	24		81	78	75	72	66	60	75	1020
180QNX40-84/7	13	17.5	380	28		95	91	87	84	77	70	80	1130
180QNX40-96/8	15	20	380	32		108	104	100	96	88	80	90	1240
180QNX40-120/10	18.5	25	380	40		135	130	125	120	110	100	100	1430
180QNX40-145/12	22	30	380	46		162	156	150	145	132	110	110	1620