
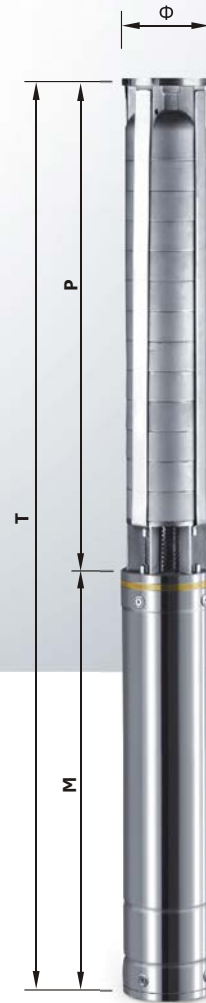


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 150QJ(G)-20T

PERFORMANCE CURVE

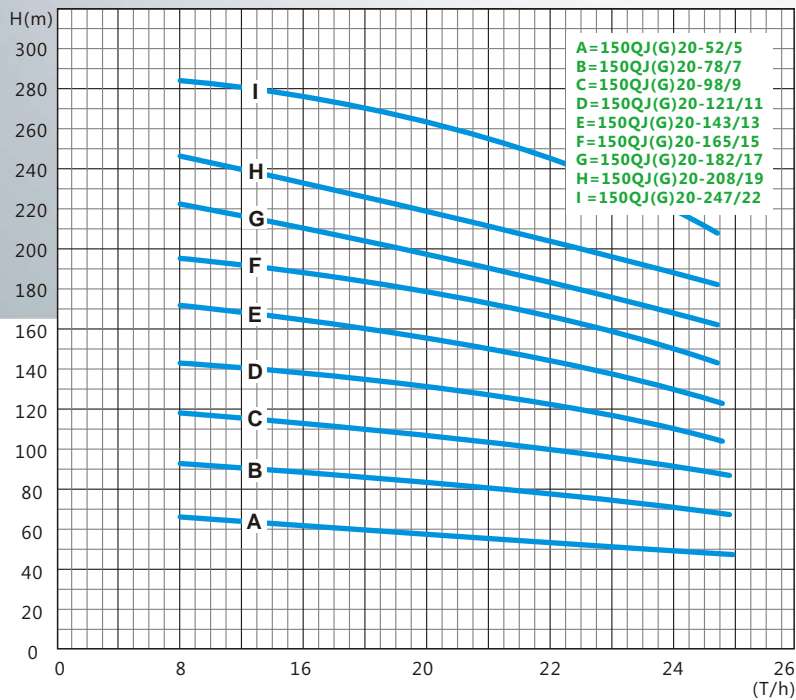

TECHNICAL DATA

Model	Power		Voltage V	Ampere A	Flow T/h	Capacity(Q) and Head(H)						Pump weight Kg	Total length T	Motor length M
	kW	HP				6	8	10	15	16	17			
150QJ(G)20-52/5	5.5	7.5	380	12.5	Head m	65	63	60	52	50	48	68	1220	650
150QJ(G)20-78/7	7.5	10	380	16.5		91	88	84	78	70	67	78	1360	690
150QJ(G)20-98/9	9.2	12.5	380	20		117	112	108	98	90	86	88	1500	730
150QJ(G)20-121/11	11	15	380	25		143	138	132	121	110	104	100	1650	780
150QJ(G)20-143/13	13	17.5	380	29		169	163	156	143	130	123	110	1800	830
150QJ(G)20-165/15	15	20	380	34		195	188	180	165	150	143	120	1960	890
150QJ(G)20-182/17	18.5	25	380	42		221	213	204	182	170	162	130	2120	950
150QJ(G)20-208/19	22	30	380	50		247	238	228	208	190	181	145	2280	1010
150QJ(G)20-247/22	25	34	380	58		286	275	264	247	220	209	170	2490	1070