
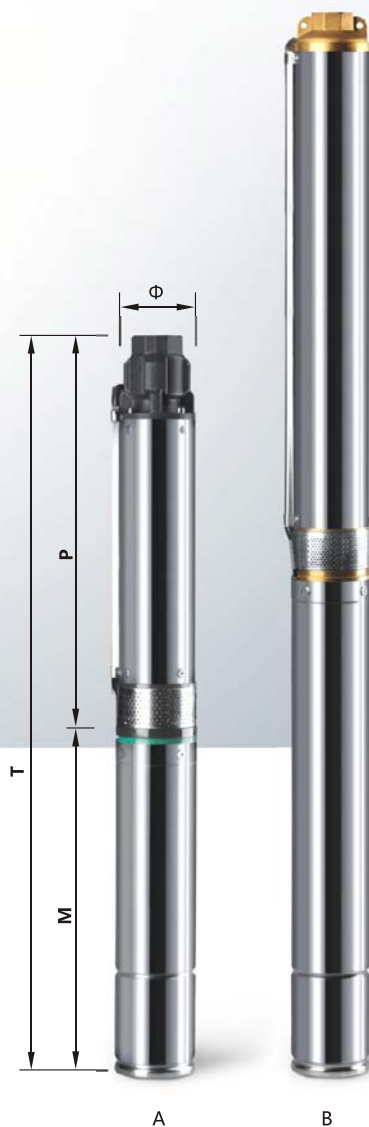


# STAINLESS STEEL SUBMERSIBLE PUMP

## MODEL 100QJ(D)-16T

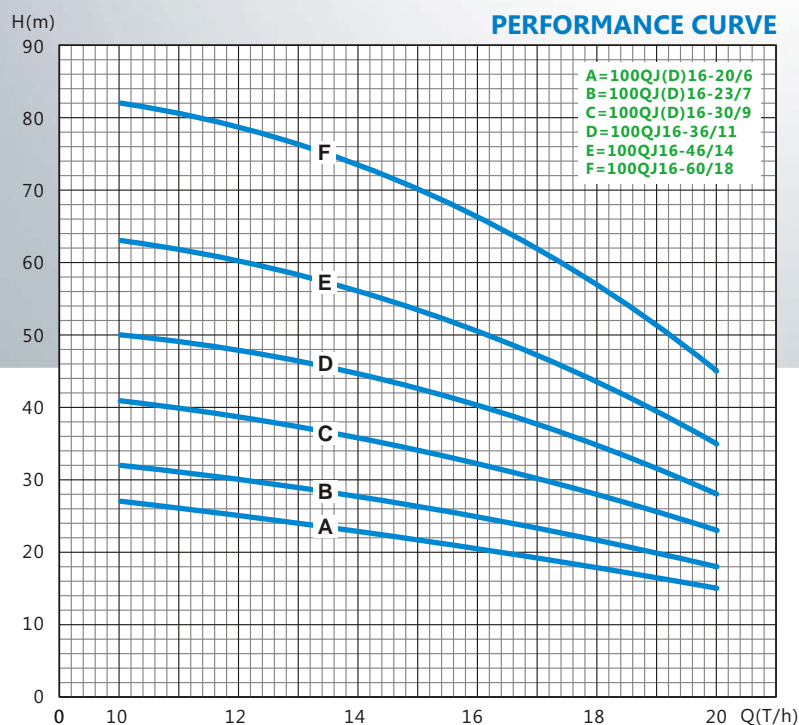

### TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Capacity(Q) and Head(H)							Pipe Dia	Pump weight (Kg)	Boundary dimension (mm)			
	kW	HP			H m	Q T/h	10	12	14	16	18			20	Total length T	Motor length M	Pump casing length P
100QJD16-20/6 A/B	1.5	2	220	10.2		27	25	22	20	18	15	18	1131	452	679	96	
100QJD16-23/7 A/B	2.2	3	220	12.5		32	29	25	23	21	18	20	1240	492	748	96	
100QJD16-30/9 A/B	3	4	220	16		41	38	33	30	27	23	23	1453	576	886	96	
100QJ16-20/6 A/B	1.5	2	380	4.5		27	25	22	20	18	15	17	1101	422	679	96	
100QJ16-23/7 A/B	2.2	3	380	5.8	H (m)	32	29	25	23	21	18	19	1200	452	748	96	
100QJ16-30/9 A/B	3	4	380	7.2		41	38	33	30	23	21	22	1378	492	886	96	
100QJ16-36/11 A/B	4	5.5	380	9.5		50	47	40	36	33	28	26	1591	567	1024	96	
100QJ16-46/14 A/B	5.5	7.5	380	12.5		63	59	50	46	42	35	30	1883	652	1231	96	
100QJ16-60/18 A/B	7.5	10	380	16.5		82	76	65	60	54	45	35	2249	742	1507	96	