


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 150QJ(G) -25T

PERFORMANCE CURVE

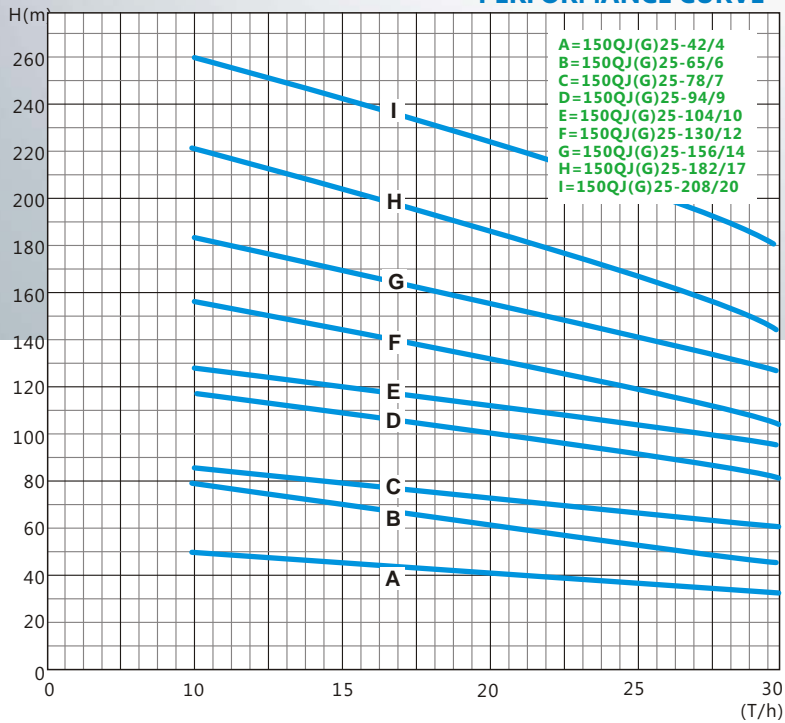

TECHNICAL DATA

Model	Power		Voltage V	Ampere A	Flow T/h	Capacity(Q) and Head(H)						Pump weight Kg	Total length T	Motor length M
	kW	HP				6	8	10	15	16	17			
150QJ(G)25-42/4	5.5	7.5	380	12.5	Head m	52	48	44	42	40	36	70	1250	650
150QJ(G)25-65/6	7.5	10	380	16.5		78	72	68	65	60	54	80	1430	690
150QJ(G)25-78/7	9.2	12.5	380	20		91	85	82	78	70	63	90	1540	730
150QJ(G)25-94/9	11	15	380	25		117	108	103	94	90	81	105	1730	780
150QJ(G)25-104/10	13	17.5	380	29		130	120	110	104	100	90	120	1850	830
150QJ(G)25-130/12	15	20	380	34		156	144	135	130	120	108	135	2050	890
150QJ(G)25-156/14	18.5	25	380	42		182	168	161	156	140	126	150	2250	950
150QJ(G)25-182/17	22	30	380	50		221	204	191	182	170	153	165	2520	1010
150QJ(G)25-208/20	25	34	380	58		260	240	230	208	200	180	180	2790	1070