
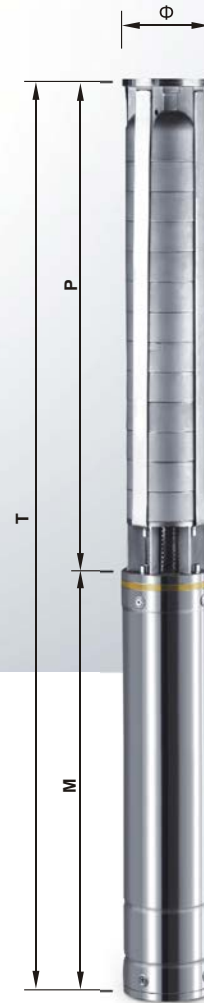


STAINLESS STEEL SUBMERSIBLE PUMP

MODEL 150QJ(G) -32T

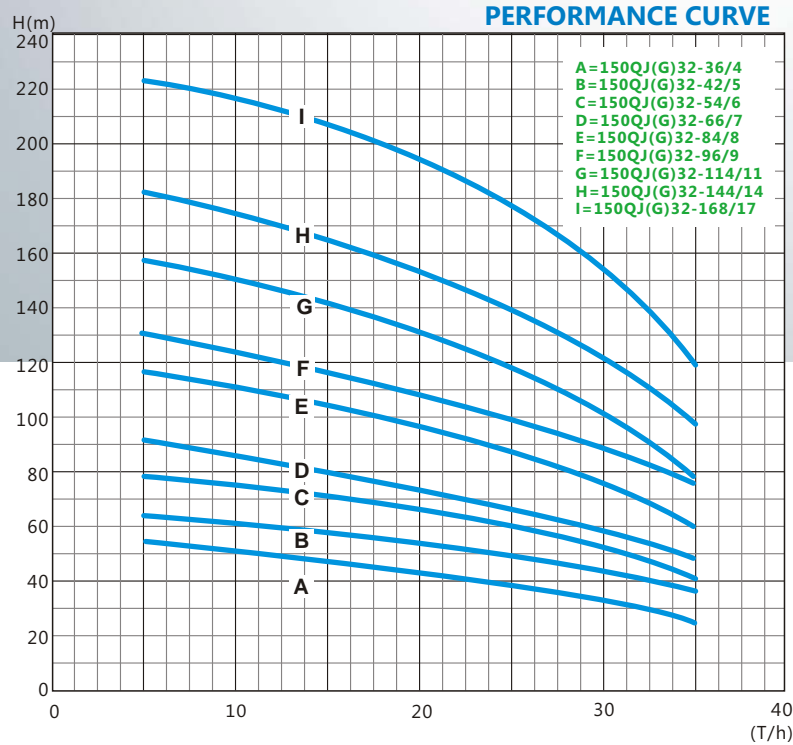

TECHNICAL DATA

Model	Power		Voltage V	Ampere A	Flow T/h	Capacity(Q) and Head(H)						Pump weight Kg	Total length T	Motor length M
	kW	HP				6	8	10	15	16	17			
150QJ(G)32-36/4	5.5	7.5	380	12.5	Head m	52	48	44	40	36	32	70	1290	650
150QJ(G)32-42/5	7.5	10	380	16.5		65	60	55	50	42	40	80	1410	690
150QJ(G)32-54/6	9.2	12.5	380	20		78	72	66	60	54	48	90	1530	730
150QJ(G)32-66/7	11	15	380	25		91	84	77	70	66	56	105	1660	780
150QJ(G)32-84/8	13	17.5	380	29		104	96	90	86	84	70	120	1790	830
150QJ(G)32-96/9	15	20	380	34		117	108	99	90	96	77	135	1930	890
150QJ(G)32-114/11	18.5	25	380	42		143	132	121	118	114	90	150	2150	950
150QJ(G)32-144/14	22	30	380	50		182	168	154	147	144	115	165	2450	1010
150QJ(G)32-168/17	25	34	380	58		221	204	187	178	168	136	180	2750	1070