
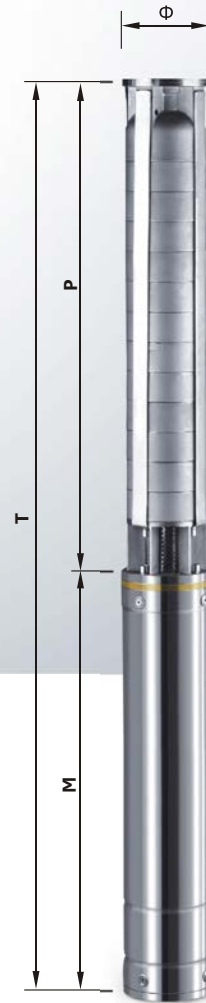


# STAINLESS STEEL SUBMERSIBLE PUMP

## MODEL 200QJ(G)-80T

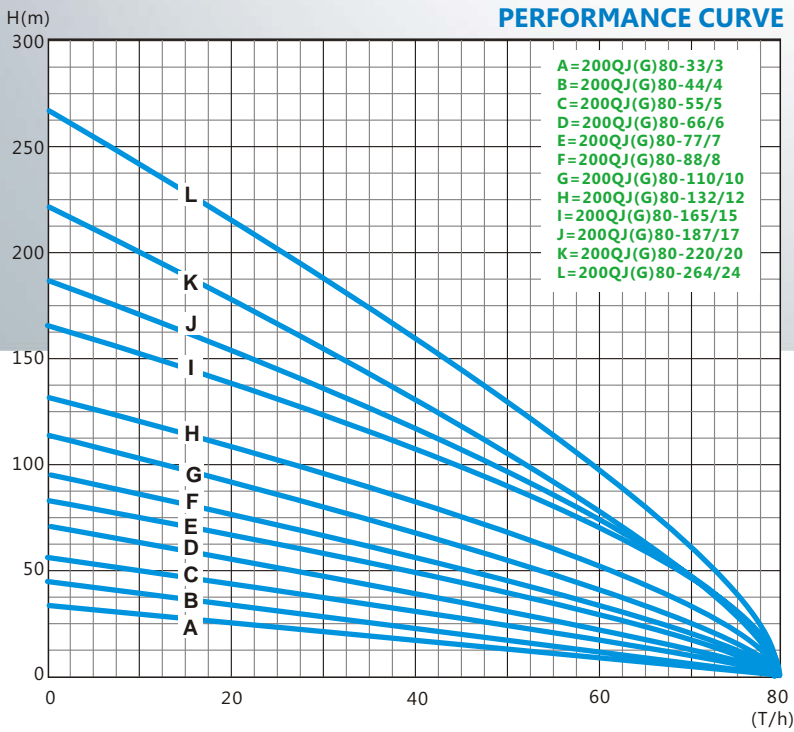

### TECHNICAL DATA

Model	Power		Voltage (V)	Ampere (A)	Flow (T/h)	Head (m)	Efficiency	External diameter (mm)	Max. Flow (T/h)
	kW	HP							
200QJ(G)80-33/3	11	15	380	28	80	33	75	184	124
200QJ(G)80-44/4	15	20	380	35	80	44	75	184	124
200QJ(G)80-55/5	18.5	25	380	42	80	55	75	184	124
200QJ(G)80-66/6	22	30	380	48	80	66	75	184	124
200QJ(G)80-77/7	25	34	380	54	80	77	75	184	124
200QJ(G)80-88/8	30	40	380	62	80	88	75	184	124
200QJ(G)80-110/10	37	50	380	70	80	110	75	184	124
200QJ(G)80-132/12	45	60	380	80	80	132	75	184	124
200QJ(G)80-165/15	55	75	380	92	80	165	75	184	124
200QJ(G)80-187/17	63	85	380	103	80	187	75	184	124
200QJ(G)80-220/20	75	100	380	115	80	220	75	184	124
200QJ(G)80-264/24	90	120	380	135	80	264	75	184	124